

# Lightology

lightology.com  
866-954-4489  
07-04-25

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **LCF1038895**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## STELLR Surface Mount

By Lucifer Lighting



### Description

The Stellr Ceiling Light features an organic shape and conceals the performance mechanics of this minimalist luminaire. A directional downlight is paired with a polymer waveguide which allows for directional and ambient light configurations. Offers the ability to change the feeling of the room as well as the appearance of the luminaire. Includes soft focus lens and a standard junction box mounting plate. Downlight available in a 35 degree beam angle. Both light sources dim independently. Integral LED drivers dimmable with electronic low voltage (ELV) or Triac dimmer down to 1%. STELLR features two light sources downlight (direct) and waveguide (indirect). For simultaneous control of these sources, wire normally. For independent control of these sources, two separate 120V wires are required.

### Specifications


COLOR . . . . . N/A  
BODY FINISH . . . . . Cashmere Gold Powdercoat  
WATTAGE . . . . . 31W  
DIMMER . . . . . Low Voltage Electronic  
DIMENSIONS . . . . . 10.23"W x 5.16"H  
INTEGRATED LED MODULE . . . . . 2 x LED/15.5W/120V LED

### Technical Information

PRODUCT DIMENSIONS . . . . . Canopy: 6.4" diameter  
LAMP LIFE . . . . . 50000 hours  
BEAM ANGLE . . . . . 35°  
COLOR RENDERING . . . . . 90 CRI  
LAMP COLOR . . . . . 2700K  
LUMENS/WATT . . . . . 127.16  
LUMINOUS FLUX . . . . . 1971 lumens



Shown in cashmere gold powdercoat

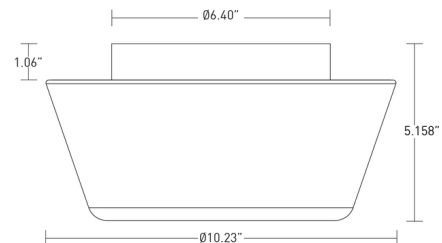

CLICK TO VIEW PRODUCT

Notes: