

# Lightology

lightology.com  
866-954-4489  
08-24-25

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **LCF1038901**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## STELLR Pendant

By Lucifer Lighting



### Description

The Stellr Pendant features an organic shape that conceals the performance mechanics of this minimalist luminaire. A directional downlight is paired with a polymer waveguide which allows for directional and ambient light configurations. Offers the ability to change the feeling of the room as well as the appearance of the luminaire. Downlight available in a 35 degree beam angle. Available with Black or White cable. Includes soft focus lens and a surface mount canopy with standard junction box mounting plate. Both light sources dim independently. Integral LED drivers dimmable with electronic low voltage (ELV) or Triac dimmer down to 1%. STELLR features two light sources downlight (direct) and waveguide (indirect). For simultaneous control of these sources, wire normally. For independent control of these sources, two separate 120V wires are required.

### Specifications


COLOR . . . . . N/A  
BODY FINISH . . . . . Satin Silver Powdercoat  
WATTAGE . . . . . 31W  
DIMMER . . . . . Low Voltage Electronic  
DIMENSIONS . . . . . 10.23"W x 4.65"H  
INTEGRATED LED MODULE . . . . . 2 x LED/15.5W/120V LED

### Technical Information

PRODUCT DIMENSIONS . . . . . Cable Length: 192"  
LAMP LIFE . . . . . 50000 hours  
BEAM ANGLE . . . . . 35°  
COLOR RENDERING . . . . . 90 CRI  
LAMP COLOR . . . . . 2700K  
LUMENS/WATT . . . . . 127.16  
LUMINOUS FLUX . . . . . 1971 lumens



Shown in satin silver powdercoat

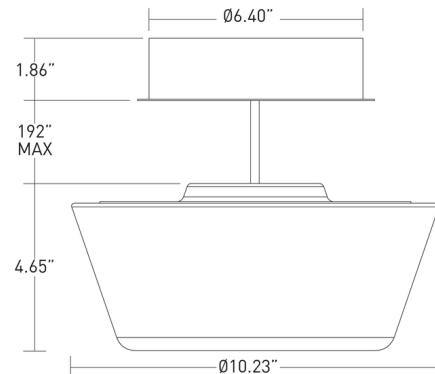

CLICK TO VIEW PRODUCT

Notes: