Lightology

lightology.com
866-954-4489
10-29-26

Project:

Company:

Location: Fixture Type:

SPEC #: **LCF1038906**

Approved On: Approved By:

STELLR Recessed Pendant


By Lucifer Lighting

Description

The Stellr Recessed Pendant features an organic shape and conceals the performance mechanics of this minimalist luminaire. A directional downlight is paired with a polymer waveguide which allows for directional and ambient light configurations. Offers the ability to change the feeling of the room as well as the appearance of the luminaire. Downlight offered with a 35 degree beam angle. Available with Black or White cable. Includes soft focus lens and an IC Airtight housing (Chicago Plenum, Airtight and Title 24 compliant). Both light sources dim independently. Integral LED drivers dimmable with electronic low voltage (ELV) or Triac dimmer down to 1%.STELLR features two light sources - downlight (direct) and waveguide (indirect). For simultaneous control of these sources, wire normally. For independent control of these sources, two separate 120V wires are required.



Shown in black powdercoat

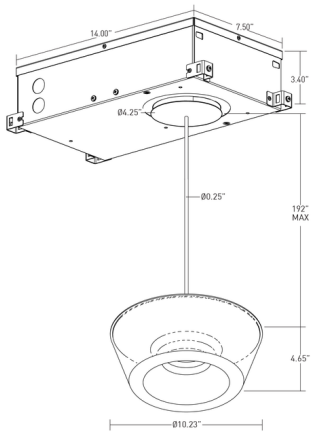

Specifications

COLOR	N/A
BODY FINISH	Black Powdercoat
WATTAGE	31W
DIMMER	Low Voltage Electronic
DIMENSIONS	10.23"W x 4.65"H
INTEGRATED LED MODULE	2 x LED/15.5W/120V LED

Technical Information

PRODUCT DIMENSIONS	Cable Length: 192"
LAMP LIFE	50000 hours
BEAM ANGLE	35°
COLOR RENDERING	90 CRI
LAMP COLOR	2700K
LUMENS/WATT	122.84
LUMINOUS FLUX	1904 lumens

CLICK TO VIEW PRODUCT

Notes: