

# Lightology

lightology.com  
866-954-4489  
02-10-26

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **LCF1038906**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## STELLR Recessed Pendant

By Lucifer Lighting



### Description

The Stellr Recessed Pendant features an organic shape and conceals the performance mechanics of this minimalist luminaire. A directional downlight is paired with a polymer waveguide which allows for directional and ambient light configurations. Offers the ability to change the feeling of the room as well as the appearance of the luminaire. Downlight offered with a 35 degree beam angle. Available with Black or White cable. Includes soft focus lens and an IC Airtight housing (Chicago Plenum, Airtight and Title 24 compliant). Both light sources dim independently. Integral LED drivers dimmable with electronic low voltage (ELV) or Triac dimmer down to 1%. STELLR features two light sources - downlight (direct) and waveguide (indirect). For simultaneous control of these sources, wire normally. For independent control of these sources, two separate 120V wires are required.

### Specifications


COLOR . . . . . N/A  
BODY FINISH . . . . . Black Powdercoat  
WATTAGE . . . . . 31W  
DIMMER . . . . . Low Voltage Electronic  
DIMENSIONS . . . . . 10.23"W x 4.65"H  
INTEGRATED LED MODULE . . . . . 2 x LED/15.5W/120V LED

### Technical Information

PRODUCT DIMENSIONS . . . . . Cable Length: 192"  
LAMP LIFE . . . . . 50000 hours  
BEAM ANGLE . . . . . 35°  
COLOR RENDERING . . . . . 90 CRI  
LAMP COLOR . . . . . 2700K  
LUMENS/WATT . . . . . 122.84  
LUMINOUS FLUX . . . . . 1904 lumens



Shown in black powdercoat

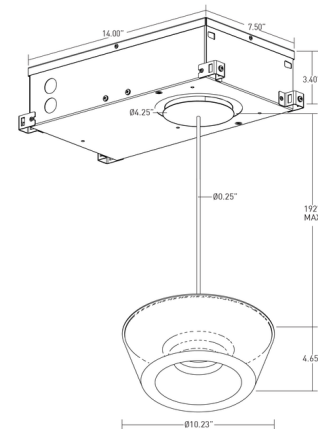

CLICK TO VIEW PRODUCT

Notes: