

Lightology

lightology.com
866-954-4489
12-07-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **JUN1042550**
Approved On: _____ Approved By: _____

6RLA 6IN LED Retrofit Adjustable Downlight

By Juno Lighting



Description

The Juno Retrofit LED Basics Series 6RLA Gen-2 6 inch adjustable trim fits into standard 6 inch IC or Non-IC recessed housing. Replaces a 65 watt incandescent lamp. Adjustable gimbal allows for up to 35 degree vertical adjustment and 359 degree rotation. Constructed of die-cast aluminum with all-in-one design with a White gimbal and flange. LED mounted directly to housing and available with choice of 2700K or 3000K color temperature in a 600 lumen option. Trim ships with a medium base socket adapter whip for installation into 6 inch recessed housings with medium base sockets. Product shipping to California does not include medium base socket adapter (L/SKTWHIP). Trim features quick connect plug installed as standard for installation into IC23 LEDT24 and IC23R LEDT24 housings with mating connector. 5 year limited warranty. Dimmable to 5% with many incandescent, magnetic low voltage or electronic low voltage dimmers (see attached manufacturer dimmer compatibility reference for compatibility).

Specifications


REFLECTOR/BAFFLE COLOR N/A
BODY FINISH White / White
WATTAGE 10.5W
DIMMER Standard 120V
DIMENSIONS 7.63"W x 2.96"H
INTEGRATED LED MODULE 1 x LED/10.5W/120V LED

Technical Information

APERTURE SIZE 6.000"
APERTURE SHAPE Round
CEILING TYPE Drywall with Trim
FUNCTION Adjustable Accent
LAMP LIFE 50000 hours
BEAM ANGLE 25°
COLOR RENDERING 90 CRI
LAMP COLOR 2700K
LUMENS/WATT 57.14
LUMINOUS FLUX 600 lumens



Shown in white / white

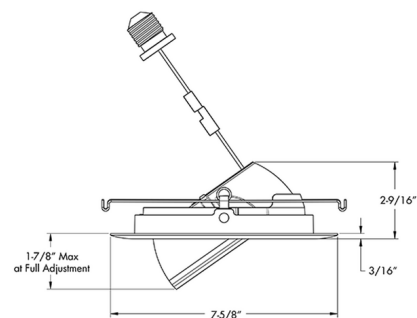

CLICK TO VIEW PRODUCT

Notes: