

# Lightology

lightology.com  
866-954-4489  
08-03-25

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **JUN1042550**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## 6RLA 6IN LED Retrofit Adjustable Downlight By Juno Lighting



### Description

The Juno Retrofit LED Basics Series 6RLA Gen-2 6 inch adjustable trim fits into standard 6 inch IC or Non-IC recessed housing. Replaces a 65 watt incandescent lamp. Adjustable gimbal allows for up to 35 degree vertical adjustment and 359 degree rotation. Constructed of die-cast aluminum with all-in-one design with a White gimbal and flange. LED mounted directly to housing and available with choice of 2700K or 3000K color temperature in a 600 lumen option. Trim ships with a medium base socket adapter whip for installation into 6 inch recessed housings with medium base sockets. Product shipping to California does not include medium base socket adapter (L/SKTWHIP). Trim features quick connect plug installed as standard for installation into IC23 LEDT24 and IC23R LEDT24 housings with mating connector. 5 year limited warranty. Dimmable to 5% with many incandescent, magnetic low voltage or electronic low voltage dimmers (see attached manufacturer dimmer compatibility reference for compatibility).

### Specifications


REFLECTOR/BAFFLE COLOR . . . . . N/A  
BODY FINISH . . . . . White / White  
WATTAGE . . . . . 10.5W  
DIMMER . . . . . Standard 120V  
DIMENSIONS . . . . . 7.63"W x 2.96"H  
INTEGRATED LED MODULE . . . . . 1 x LED/10.5W/120V LED

### Technical Information

APERTURE SIZE . . . . . 6.000"  
APERTURE SHAPE . . . . . Round  
CEILING TYPE . . . . . Drywall with Trim  
FUNCTION . . . . . Adjustable Accent  
LAMP LIFE . . . . . 50000 hours  
BEAM ANGLE . . . . . 25°  
COLOR RENDERING . . . . . 90 CRI  
LAMP COLOR . . . . . 2700K  
LUMENS/WATT . . . . . 57.14  
LUMINOUS FLUX . . . . . 600 lumens



Shown in white / white

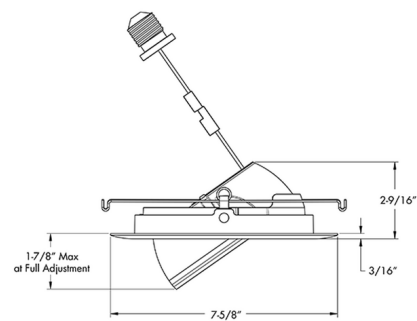

CLICK TO VIEW PRODUCT

Notes: