



BRAND

Juno Lighting

DESCRIPTION



The MD1LG2 Series Round Mini LED Downlight features a sleek, compact form providing direct accent lighting with low glare optic system. Ideal for both residential and commercial wet location applications including bathrooms and eave lighting. Available in a White finish. Includes 5 watts LED with 2700K color temperature, 90+CRI and Narrow Flood (25 degree) beam angle optic. Comparable light output to a 20 watt halogen. 50,000 hour average lamp life. Designed for use in IC (insulated ceiling) or Non-IC construction. UL listed. May be dimmed using the following Juno qualified dimmers: : Leviton Acenti Ace-06-1L, Lutron Diva DVELV-300P, Lutron Nova T NTELV 300, Lutron Skylark SELV-300P, or Lutron Spacer SPSELV-600, sold separately. Note: Includes 12 volt onboard LED driver, but requires a remote Class II electronic transformer (recommended Juno TL602E low voltage electronic transformer) to complete the system, sold separately.



TRIM COLOR	N/A
BODY FINISH	White
WATTAGE	4.8W
DIMMER	Low Voltage Electronic
DIMENSIONS	2.25"W x 2.9"H
INTEGRATED LED MODULE	
LAMP	1 x LED/4.8W/12V LED

Technical Information

LUMINOUS FLUX	300 lumens
LUMENS/WATT	62.50
LAMP COLOR	2700K
COLOR RENDERING	90 CRI
BEAM ANGLE	25°
LAMP LIFE	50000 hours
FUNCTION	Adjustable Accent
CEILING TYPE	Drywall with Trim
HOUSING TYPE	Remodel NON IC
HOUSING HEIGHT	3"
SPEC #	JUN1042600

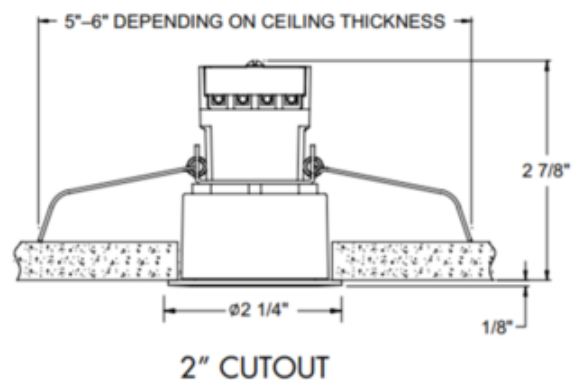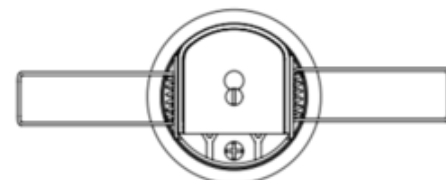

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE