

BRAND MaxLite


DESCRIPTION

The Slim Flood Light features a die-cast aluminum housing with corrosion resistant powder coat paint and UV resistant polycarbonate lens. Available in two lumen options in CCT selectable color temperature (3000K/4000K/5000K). Wide flood beam angle. A 3-pin NEMA twist lock photocell receptacle with shorting cap is included as standard. Offered in yoke mount, slipfitter knuckle, or knuckle with .5 inch thread mounting options.



Shown in: Bronze

SHADE COLOR	N/A
BODY FINISH	Bronze
WATTAGE	70W
DIMMER	N/A
DIMENSIONS	10.42"W x 11.27"H x 2.11"D
INTEGRATED LED MODULE	
LAMP	1 x LED/120-277V LED
Technical Information	
LUMINOUS FLUX	9200 lumens
LUMENS/WATT	131.43
LAMP COLOR	CCT Select
COLOR RENDERING	80 CRI
SPEC #	MXT1047320

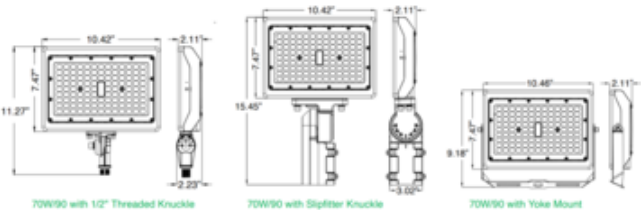

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE