



DESIGNER Gregory Kay
BRAND PureEdge Lighting


DESCRIPTION

Angle Display Sign Light with FTP Feed Thru Stem features a lambertian white diffuser that provides uniform light without hotspots. At 7.5 watts per foot, the 24 volt DC channel is available with 5700K color temperature, 85+CRI. Finish in Satin Nickel in a 36 inch length. Arm extends 14 inches from wall. Hinges on the fixture arm rotates up to 90 degrees. Can be powered using a 60 watt electronic low voltage (ELV) power supply (PS-60L-ELV) that fits inside junction box, or a Universal (UNI) power supply that requires a remote installation, sold separately. Universal power supply dimmable with electronic low voltage (ELV), Triac or 0-10V dimmer, sold separately. ETL listed. Major components made and assembled in the USA. Fixture includes a 5 year warranty. Product is built to order. Required power supply and dimmer control sold separately.Note: For indoor use only.



Shown in: Satin Nickel

SHADE COLOR	N/A
BODY FINISH	Satin Nickel
WATTAGE	22.5W
DIMMER	Low Voltage Electronic
DIMENSIONS	36"L x 1.37"W x 1.4"H x 14"D
INTEGRATED LED MODULE	
LAMP	3 x LED/24V LED
Technical Information	
LUMINOUS FLUX	810 lumens
LUMENS/WATT	108.00
LAMP COLOR	5700K
COLOR RENDERING	85 CRI
SPEC #	EDG1051377

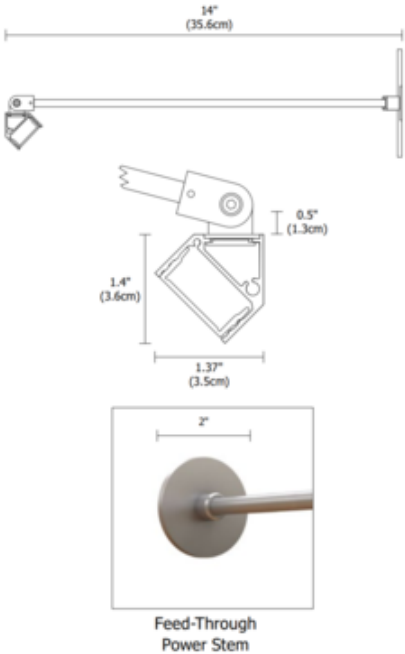

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE