



**BRAND**

Contrast Lighting

**DESCRIPTION**

IT2000CM 4 inch low voltage Non-IC shallow remodel housing is equipped with thermal protection and is suitable for damp locations. Cannot be used in contact with insulation and should be at least 3 inches from insulation. Magnetic 120 volt to 12 volt transformer included. Takes up to 7/8 inch thick ceiling. Below ceiling accessible. One 42 watt maximum, 12 volt GU5.3 MR16 bulb is required, but not included. Dimmable with a low voltage magnetic dimmer. Consult bulb manufacturer for low voltage magnetic dimmer compatibility when using LED bulb option. 4.25 inch ceiling cut out. 13.25 inch length x 5.4 inch width x 3.7 inch height. A complete fixture includes a housing and trim, sold separately.





<b>TRIM COLOR</b>	N/A
<b>BODY FINISH</b>	Galvanized Steel
<b>WATTAGE</b>	42W
<b>DIMMER</b>	Low Voltage Magnetic
<b>DIMENSIONS</b>	13.25"L x 5.4"W x 3.7"H
<b>BULB NOT INCLUDED</b>	
<b>LAMP</b>	MR16/GU5.3 (bipin)/42W/12V Halogen MR16/GU5.3 (bipin)/12V LED

*Technical Information*

<b>CEILING TYPE</b>	Drywall with Trim
<b>HOUSING TYPE</b>	Remodel NON IC
<b>HOUSING HEIGHT</b>	4"
<b>APERTURE SIZE</b>	4.000"

**SPEC #** CLT106648

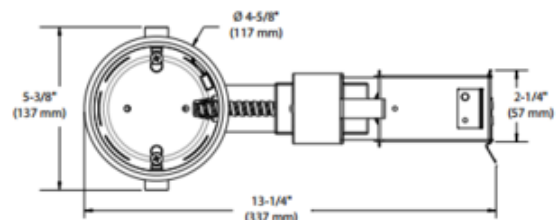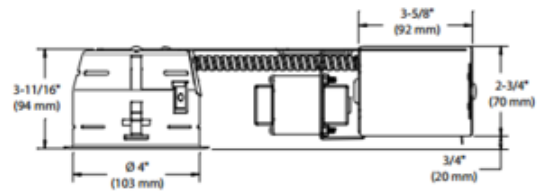

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE