

Low Voltage 3.5IN Remodel Magnetic Non-IC Housing



Description:

IT3000M 3.5 Inch Low Voltage Non-IC Remodel Housing is designed for non insulated remodel applications. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Below ceiling accessible. Takes up to 7/8 inch ceiling thickness. Low voltage 12 volt magnetic transformer included. One 37-50 watt, 12 volt GU5.3 MR16 bulb is required, but not included. Wattage dependent on housing/trim combination. Dimmable with a low voltage magnetic dimmer. Consult with bulb manufacturer for low voltage magnetic dimmer compatibility when using LED bulb option. Suitable for damp locations. UL listed. 3 5/8 inch ceiling cut out. 13.3 inch length x 4.6 inch width x 6 inch height. A complete fixture includes a housing and trim, sold separately.





Shown in: Galvanized Steel

List Price: \$82.75
 Our Price: \$53.62

Shade Color: N/A
 Body Finish: Galvanized Steel
 Lamp: 1 x MR16/GU5.3 (bipin)/35W/12V Halogen
 1 x MR16/GU5.3 (bipin)/12V LED
 Wattage: 35W
 Dimmer: Low Voltage Magnetic
 Dimensions: 13"L x 4.25"W x 4.5"H

Technical Information

Ceiling Type: Drywall with Trim
 Housing Type: Remodel NON IC
 Housing Height: 5"
 Aperture Size: 3.500"

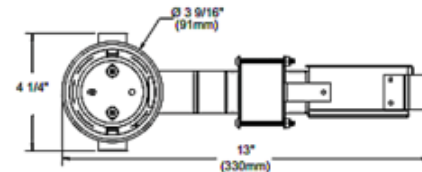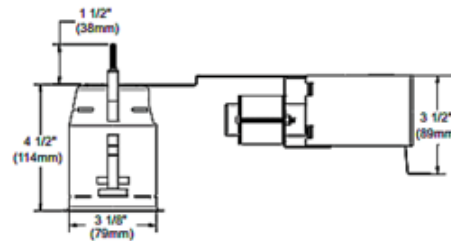

Fax: (773) 883-6131

Phone: 866-954-4489

Address: 1718 W. Fullerton Ave. Chicago IL 60614

www.Lightology.com

Product Number: CLT106650			
Company:		Fixture Type:	Date: Oct 16, 2019
Project:		Approved By:	