




BRAND

Contrast Lighting

DESCRIPTION

IT3000M 3.5 Inch Low Voltage Non-IC Remodel Housing is designed for non insulated remodel applications. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Below ceiling accessible. Takes up to 7/8 inch ceiling thickness. Low voltage 12 volt magnetic transformer included. One 37-50 watt, 12 volt GU5.3 MR16 bulb is required, but not included. Wattage dependent on housing/trim combination. Dimmable with a low voltage magnetic dimmer. Consult with bulb manufacturer for low voltage magnetic dimmer compatibility when using LED bulb option. Suitable for damp locations. UL listed. 3 5/8 inch ceiling cut out. 13.3 inch length x 4.6 inch width x 6 inch height. A complete fixture includes a housing and trim, sold separately.

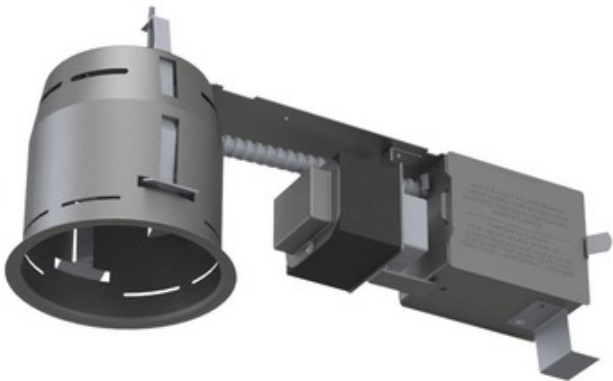


TRIM COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	35W
DIMMER	Low Voltage Magnetic
DIMENSIONS	13"L x 4.25"W x 4.5"H
BULB NOT INCLUDED	
LAMP	1 x MR16/GU5.3 (bipin)/35W/12V Halogen MR16/GU5.3 (bipin)/12V LED

Technical Information

CEILING TYPE	Drywall with Trim
HOUSING TYPE	Remodel NON IC
HOUSING HEIGHT	5"
APERTURE SIZE	3.500"

SPEC #	CLT106650
--------	-----------

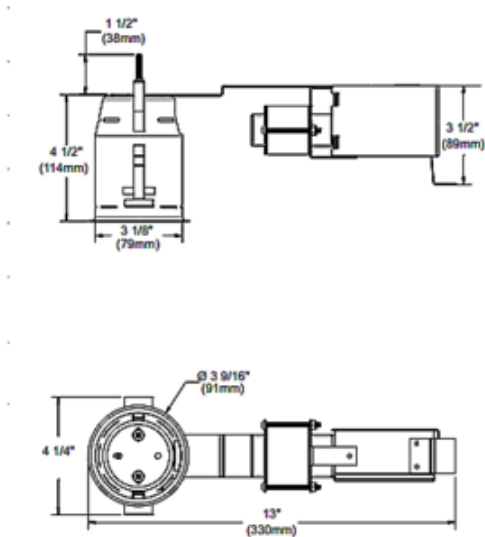

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE