



**BRAND**

Contrast Lighting

**DESCRIPTION**

IT5000CE 2.5 Inch Low Voltage Non-IC Shallow Remodel Housing is designed for non insulated remodel applications. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Below ceiling accessible. Takes up to 7/8 inch ceiling thickness. Low voltage 12 volt electronic transformer included. One 20 watt, 12 volt MR11 bipin bulb is required, but not included. Dimmable with a low voltage electronic dimmer. Suitable for damp locations. UL listed. 2.6 inch cut out. 9.5 inch length x 3.9 inch width x 3.4 inch height. A complete fixture includes a housing and trim, sold separately.





<b>TRIM COLOR</b>	N/A
<b>BODY FINISH</b>	Galvanized Steel
<b>WATTAGE</b>	20W
<b>DIMMER</b>	Low Voltage Electronic
<b>DIMENSIONS</b>	9.5"L x 3.8"W x 3.4"H
<b>BULB NOT INCLUDED</b>	
<b>LAMP</b>	1 x MR11/Bipin/20W/12V Halogen

*Technical Information*

<b>CEILING TYPE</b>	Drywall with Trim
<b>HOUSING TYPE</b>	Remodel NON IC
<b>HOUSING HEIGHT</b>	4"
<b>APERTURE SIZE</b>	2.500"

**SPEC #** CLT106653

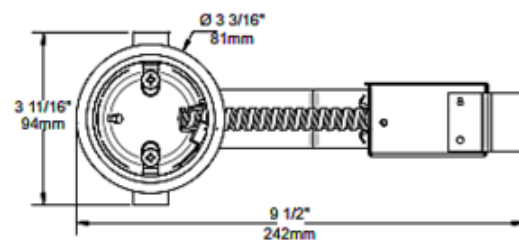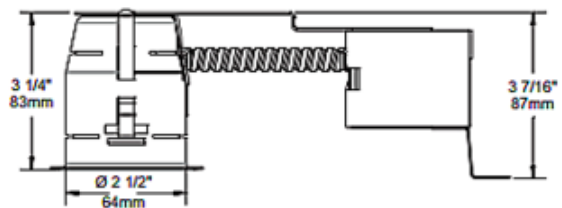

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE