

# Lightology

lightology.com  
866-954-4489  
05-24-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **GRC1080757**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Selectfit Color Select Commercial Retrofit Kit By Green Creative



### Description

Make retrofit projects easier with the Selectfit commercial downlight family. The Selectfit Retrofit Downlight with integrated driver is IC and Air-tight rated used to retrofit existing commercial housings, and is field accessible from below the ceiling. For use in retrofit and new construction applications. Self flanged spun aluminum reflector, painted matte white. Optional clear diffuser available, sold separately. High resistance polycarbonate optical lens, with smooth diffusion. 90 beam angle. Features SelectKelvin technology with field select 3000K/3500K/4000K color temperature options. Choose either Low, Medium or High light output. Select the color temperature before, during or after installation with just the flip of a switch. Available in 120V or 120-277V options. 120V dimmable to 10% using TRIAC or ELV dimmers. Universal 120-277V, dimmable to 5% with 0-10V dimmers.

### Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	White
WATTAGE	12W
DIMMER	Low Voltage Electronic
DIMENSIONS	4"W x 4"H
INTEGRATED LED MODULE	1 x LED/12W/120V LED

### Technical Information

LAMP LIFE	50000 hours
BEAM ANGLE	90°
COLOR RENDERING	.80 CRI
LAMP COLOR	. CCT Select
LUMENS/WATT	83.33
LUMINOUS FLUX	1000 lumens



Shown in white

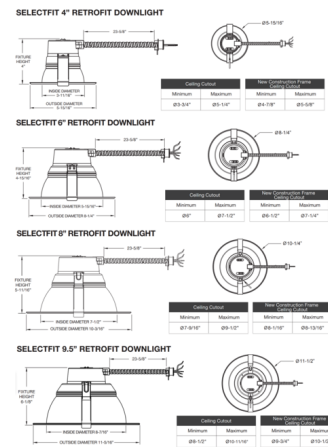

CLICK TO VIEW PRODUCT

Notes: