Lightology

lightology.com
866-954-4489
10-29-26

Project:

Company:

Location: Fixture Type:

SPEC #: **GRC1080789**

Approved On: Approved By:

Innofit Round Commercial Retrofit Downlight


By Green Creative

Description

Make retrofit projects easier with the Innofit commercial downlight family. The Innofit Gen2 Retrofit Downlight with integrated driver is IC Air-tight rated to retrofit existing commercial housings, and is field accessible from below the ceiling. Self flanged spun aluminum reflector in matte white. High resistance polycarbonate optical lens, with smooth diffusion. High end white finish polycarbonate baffle trim. Offered in 2700K, 3000K, 3500K or 4000K color temperature options. Features SelectDrive field select lumen output with Low, Medium, High switch. Available in 120V and 120-277V options. 120V dimmable to 10% using forward or reverse phase dimmers. 120-277V dimmable to 5% with 0-10V dimmers.



Shown in white

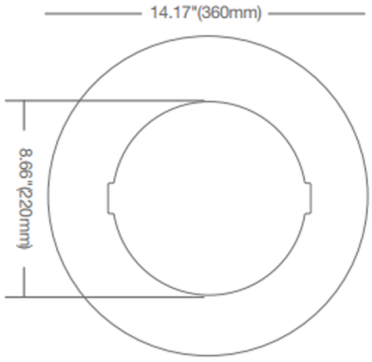

Specifications

REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	White
WATTAGE	10W
DIMMER	Low Voltage Electronic
DIMENSIONS	4"W x 3.25"H
INTEGRATED LED MODULE	1 x LED/10W/120V LED

Technical Information

LAMP LIFE	50000 hours
BEAM ANGLE	90°
COLOR RENDERING	80 CRI
LAMP COLOR	2700K
LUMENS/WATT	102.00
LUMINOUS FLUX	1020 lumens

CLICK TO VIEW PRODUCT

Notes: