

Lightology

lightology.com
866-954-4489
07-11-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **EDG1081924**
 Approved On: _____ Approved By: _____

Cirrus Ceiling Wall Wash Tunable White w/ Glare Shield By PureEdge Lighting



Description

The Cirrus 2K6K Tunable White Wall Wash with Glare Shield (remote power) is designed to block glare and illuminate vertical surfaces from the top of the ceiling to the floor at a 3.3:1 ratio. Available with 5 watts per foot in one foot increments up to 96 nominal inches (lengths shown are actual). Using the latest in LED technology Tunable White 2K6K (2000K-6500K) grants independent control and adjustment of color temperature and intensity from 2000K (sunset) through 6500K (daylight white). Features a standard diffused white wall wash lens and optional black or white louvers. Offered with choice of 4 inch square split canopy (4S) that mounts to a standard junction box or a Slim Profile canopy with junction box (1R) with no visible canopy, a 6 foot whip, and drywall mounting clips (CC-MCL) every 18 inches. Optional accessories sold separately. Note: Requires a Tunable White 2XK power supply (with the CDMX-2XK Tunable White controller), or 0-10V 2-Channel Tunable White power supply (with two dimmers: one for intensity and one for color temperature), sold separately.

Specifications


COLOR No Louver
 BODY FINISH Satin Nickel
 WATTAGE 5W
 DIMMER N/A
 DIMENSIONS 13"L x 0.9"W x 1.25"H
 INTEGRATED LED MODULE 1 x LED/5W/120V LED

Technical Information

LAMP LIFE 50000 hours
 COLOR RENDERING 92 CRI
 LAMP COLOR 2000K-6000K Tunable White
 LUMENS/WATT 116.40
 LUMINOUS FLUX 582 lumens



Shown in satin nickel / no louver

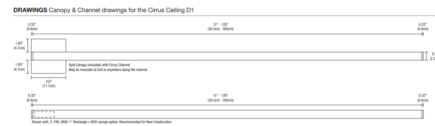

CIRRUS CEILING WALL WASH WITH GLARE SHIELD



CIRRUS CEILING WALL WASH WITH GLARE SHIELD AND BLACK LOUVER



CLICK TO VIEW PRODUCT

Notes: