

# Lightology

lightology.com  
866-954-4489  
04-25-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **EDG1081924**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Cirrus Ceiling Wall Wash Tunable White w/ Glare Shield By PureEdge Lighting



### Description

The Cirrus 2K6K Tunable White Wall Wash with Glare Shield (remote power) is designed to block glare and illuminate vertical surfaces from the top of the ceiling to the floor at a 3.3:1 ratio. Available with 5 watts per foot in one foot increments up to 96 nominal inches (lengths shown are actual). Using the latest in LED technology Tunable White 2K6K (2000K-6500K) grants independent control and adjustment of color temperature and intensity from 2000K (sunset) through 6500K (daylight white). Features a standard diffused white wall wash lens and optional black or white louvers. Offered with choice of 4 inch square split canopy (4S) that mounts to a standard junction box or a Slim Profile canopy with junction box (1R) with no visible canopy, a 6 foot whip, and drywall lmounting clips (CC-MCL) every 18 inches. Optional accessories sold separately. Note: Requires a Tunable White 2XK power supply (with the CDMX-2XK Tunable White controller), or 0-10V 2-Channel Tunable White power supply (with two dimmers: one for intensity and one for color temperature), sold separately.

### Specifications


COLOR	No Louver
BODY FINISH	Satin Nickel
WATTAGE	5W
DIMMER	N/A
DIMENSIONS	13"L x 0.9"W x 1.25"H
INTEGRATED LED MODULE	1 x LED/5W/120V LED

### Technical Information

LAMP LIFE	50000 hours
COLOR RENDERING	92 CRI
LAMP COLOR	2000K-6000K Tunable White
LUMENS/WATT	116.40
LUMINOUS FLUX	582 lumens



Shown in satin nickel / no louver

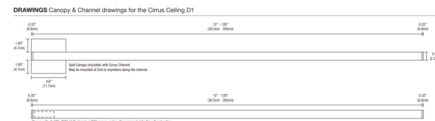

CLICK TO VIEW PRODUCT

Notes: