



DESIGNER

Gregory Kay

BRAND

PureEdge Lighting

DESCRIPTION

The LRF7 Flexible Neon bends left or right with a 0.7 inch wide flat lens offering superior color rendering while creating uniform illumination without visible dots. May be surface or flush mounted. Sold in 5 foot increments at 5 watts (4.4 watts) per foot up to 20 feet. Dynamic Tunable White (2K6K) color temperature option. The 2K6K option ranges from 2000K through 6500K (daylight). Tunable White allows for independent control for adjusting LED color temperature and brightness. IP65 rated for outdoor wet locations. System includes Outdoor 24VDC LED Flex Neon, End Cap, Power Connector (connected to each end of fixture), Wet Location Barrel Connectors, and Mounting Clips (provided with every two feet of Flex Neon). Optional mounting accessories and dimmer control sold separately. System requires outdoor rated Tunable White power supply with power supply enclosure, or 0-10V Tunable White 2-channel power supply, sold separately. 0-10V Dimming: Requires two dimmers, one for intensity and one for color temperature. DMX Dynamic Color Changing: Requires CDMX1-1 controller. Note: Product is built to order.





Shown in: White

SHADE COLOR	White
BODY FINISH	N/A
WATTAGE	25W
DIMMER	N/A
DIMENSIONS	60"L x 0.7"W x 0.75"H
INTEGRATED LED MODULE	
LAMP	5 x LED/5W/24V LED

Technical Information

LUMINOUS FLUX	1583 lumens
LUMENS/WATT	316.60
LAMP COLOR	2000K-6000K Tunable White
COLOR RENDERING	90 CRI
BEAM ANGLE	120°

SPEC # EDG1093456

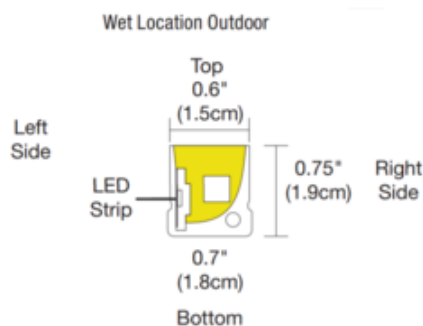

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE