

Lightology

lightology.com
866-954-4489
02-13-26

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **EDG1117767**
Approved On: _____ Approved By: _____

Vanishing Point Tubo LG Downlight - Drywall 24V/Remote Power

By PureEdge Lighting



Description

The Vanishing Point Tubo Large Downlight integrates with the Vanishing Point Plaster-In-System for use in drywall applications. Features a .5 inch opening with no visible canopy line -- just the small .5 inch point of connection where the fixture stem disappears into the ceiling. Available in a variety of color temperature options, including Warm Dim 3000K-1800K, offered in multiple beam spread options that can be changed in the field. 2400K, 2700K, 3000K and 3500K available in Spot (20 degree), Narrow Flood (35 degree), Flood (45 degree), and Wide Flood (60 degree) beam angle options. Warm Dim available in Spot (20 degree), Flood (45 degree), and Wide Flood (60 degree) only. Note: A 24VDC remote Universal power supply is required and sold separately. Universal power supply dimmable with ELV/TRIAC/0-10V. Note: Title 24 compliant when used with a Universal power supply and 2700K color temperature.

Specifications


| | |
|-----------------------|------------------------|
| COLOR | N/A |
| BODY FINISH | White |
| WATTAGE | 14W |
| DIMMER | Low Voltage Electronic |
| DIMENSIONS | 2.34"W x 4.92"H |
| INTEGRATED LED MODULE | 1 x LED/14W/24V LED |

Technical Information

| | |
|-----------------|-------------|
| LAMP LIFE | 60000 hours |
| BEAM ANGLE | 20° |
| COLOR RENDERING | 97 CRI |
| LAMP COLOR | 2400K |
| LUMENS/WATT | 73.71 |
| LUMINOUS FLUX | 1032 lumens |



Shown in white

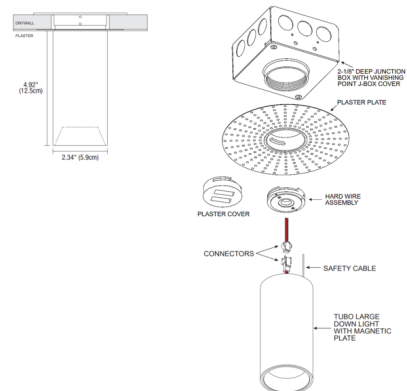

CLICK TO VIEW PRODUCT

Notes: