



DESIGNER

Gregory Kay

BRAND

PureEdge Lighting

DESCRIPTION

The Vanishing Point Radiant Large integrates with the Vanishing Point Plaster-In-System for use in drywall applications. Features a .5 inch opening with no visible canopy line -- just the small .5 inch point of connection where the fixture stem disappears into the ceiling. Radiant heat sink swivels 90 degrees vertically and 360 degrees horizontally. Available in a variety of color temperature options, including Warm Dim (3000K-1800K), offered in multiple beam spread options that can be changed in the field: 2400K, 2700K, 3000K and 3500K available in Narrow Spot (10 degree), Spot (20 degree), Narrow Flood (35 degree), Flood (45 degree), and Wide Flood (60 degree) beam angle options. Warm Dim available in Narrow Spot (15 degree), Spot (25 degree), Narrow Flood (35 degree), Flood (45 degree), and Wide Flood (60 degree). You may feed up to to 7 Radiant large fixtures with a single 24VDC remote Universal power supply (power supply required and sold separately). Universal power supply dimmable with ELV/TRIAC/0-10V. Note: Required remote power supply sold separately.




Shown in: White

SHADE COLOR	N/A
BODY FINISH	White
WATTAGE	14W
DIMMER	Low Voltage Electronic
DIMENSIONS	2.34"W x 3.4"H
INTEGRATED LED MODULE	
LAMP	1 x LED/14W/24V LED

Technical Information

LUMINOUS FLUX	1256 lumens
LUMENS/WATT	89.71
LAMP COLOR	2400K
COLOR RENDERING	97 CRI
BEAM SPREAD	Narrow spot
BEAM ANGLE	10°

SPEC # EDG1117835

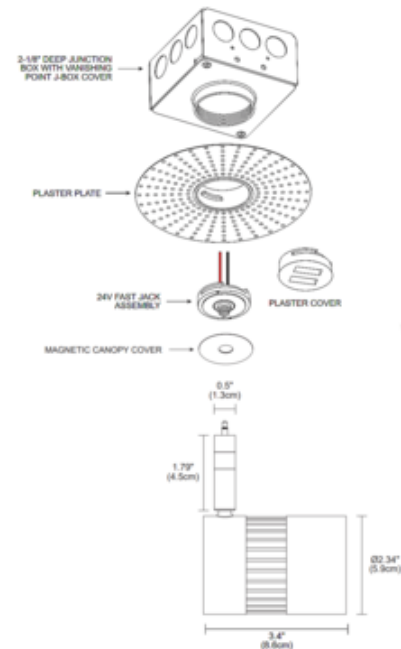

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE