

# Lightology

lightology.com  
866-954-4489  
08-18-25

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **EDG1117835**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Vanishing Point Radiant Large for Drywall 24V/Remote Power

By PureEdge Lighting



### Description

The Vanishing Point Radiant Large integrates with the Vanishing Point Plaster-In-System for use in drywall applications. Features a .5 inch opening with no visible canopy line -- just the small .5 inch point of connection where the fixture stem disappears into the ceiling. Radiant heat sink swivels 90 degrees vertically and 360 degrees horizontally. Available in a variety of color temperature options, including Warm Dim (3000K-1800K), offered in multiple beam spread options that can be changed in the field: 2400K, 2700K, 3000K and 3500K available in Narrow Spot (10 degree), Spot (20 degree), Narrow Flood (35 degree), Flood (45 degree), and Wide Flood (60 degree) beam angle options. Warm Dim available in Narrow Spot (15 degree), Spot (25 degree), Narrow Flood (35 degree), Flood (45 degree), and Wide Flood (60 degree). You may feed up to to 7 Radiant large fixtures with a single 24VDC remote Universal power supply (power supply required and sold separately). Universal power supply dimmable with ELV/TRIAC/0-10V. Note: Required remote power supply sold separately.

### Specifications


COLOR . . . . . N/A  
BODY FINISH . . . . . White  
WATTAGE . . . . . 14W  
DIMMER . . . . . Low Voltage Electronic  
DIMENSIONS . . . . . 2.34"W x 3.4"H  
INTEGRATED LED MODULE . . . . . 1 x LED/14W/24V LED

### Technical Information

LAMP LIFE . . . . . 60000 hours  
BEAM ANGLE . . . . . 10°  
BEAM SPREAD . . . . . Narrow spot  
COLOR RENDERING . . . . . 97 CRI  
LAMP COLOR . . . . . 2400K  
LUMENS/WATT . . . . . 89.71  
LUMINOUS FLUX . . . . . 1256 lumens



Shown in white

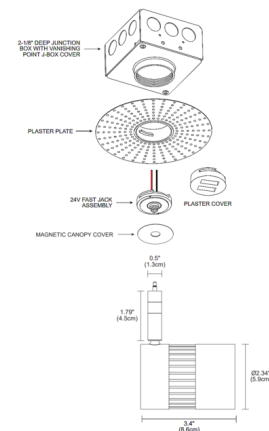

CLICK TO VIEW PRODUCT

Notes: