

Lightology

lightology.com
866-954-4489
05-17-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **EDG1117835**
 Approved On: _____ Approved By: _____

Vanishing Point Radiant Large for Drywall 24V/Remote Power By PureEdge Lighting



Description

The Vanishing Point Radiant Large integrates with the Vanishing Point Plaster-In-System for use in drywall applications. Features a .5 inch opening with no visible canopy line -- just the small .5 inch point of connection where the fixture stem disappears into the ceiling. Radiant heat sink swivels 90 degrees vertically and 360 degrees horizontally. Available in a variety of color temperature options, including Warm Dim (3000K-1800K), offered in multiple beam spread options that can be changed in the field: 2400K, 2700K, 3000K and 3500K available in Narrow Spot (10 degree), Spot (20 degree), Narrow Flood (35 degree), Flood (45 degree), and Wide Flood (60 degree) beam angle options. Warm Dim available in Narrow Spot (15 degree), Spot (25 degree), Narrow Flood (35 degree), Flood (45 degree), and Wide Flood (60 degree). You may feed up to to 7 Radiant large fixtures with a single 24VDC remote Universal power supply (power supply required and sold separately). Universal power supply dimmable with ELV/TRIAC/0-10V. Note: Required remote power supply sold separately.

Specifications


COLOR	N/A
BODY FINISH	White
WATTAGE	14W
DIMMER	Low Voltage Electronic
DIMENSIONS	2.34"W x 3.4"H
INTEGRATED LED MODULE	1 x LED/14W/24V LED

Technical Information

LAMP LIFE	60000 hours
BEAM ANGLE	10°
BEAM SPREAD	Narrow spot
COLOR RENDERING	97 CRI
LAMP COLOR	2400K
LUMENS/WATT	89.71
LUMINOUS FLUX	1256 lumens



Shown in white

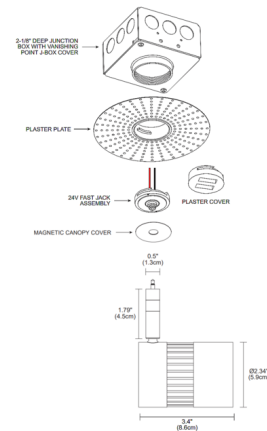

CLICK TO VIEW PRODUCT

Notes: