

# Lightology

lightology.com  
866-954-4489  
02-14-26

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **EDG1117885**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Vanishing Point Radiant Medium for Drywall 24V/Remote Power

By PureEdge Lighting




### Description

The Vanishing Point Radiant Medium integrates with the Vanishing Point Plaster-In-System for use in drywall applications. Features a .5 inch opening with no visible canopy line -- just the small .5 inch point of connection where the fixture stem disappears into the ceiling. Radiant heat sink swivels 90 degrees vertically and 360 degrees horizontally. Available in a variety of color temperature options, including Warm Dim (3000K-1800K), offered in multiple beam spread options that can be changed in the field: Spot (20 degree), Narrow Flood (35 degree), Flood (45 degree), and Wide Flood (60 degree) beam angle options. You may feed up to 9 Radiant medium fixtures with a single 24VDC remote Universal power supply (power supply required and sold separately). Universal power supply dimmable with ELV/TRIAC/0-10V. Note: Required remote power supply sold separately.



Shown in white

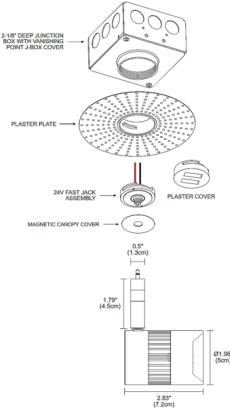

### Specifications

COLOR	N/A
BODY FINISH	White
WATTAGE	11W
DIMMER	Low Voltage Electronic
DIMENSIONS	1.96" W x 2.83" H
INTEGRATED LED MODULE	1 x LED/11W/24V LED

### Technical Information

LAMP LIFE	60000 hours
BEAM ANGLE	20°
COLOR RENDERING	97 CRI
LAMP COLOR	2400K
LUMENS/WATT	76.91
LUMINOUS FLUX	846 lumens



CLICK TO VIEW PRODUCT

Notes: