

Lightology

lightology.com
866-954-4489
07-01-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **EDG1117885**
Approved On: _____ Approved By: _____

Vanishing Point Radiant Medium for Drywall 24V/Remote Power

By PureEdge Lighting



Description

The Vanishing Point Radiant Medium integrates with the Vanishing Point Plaster-In-System for use in drywall applications. Features a .5 inch opening with no visible canopy line -- just the small .5 inch point of connection where the fixture stem disappears into the ceiling. Radiant heat sink swivels 90 degrees vertically and 360 degrees horizontally. Available in a variety of color temperature options, including Warm Dim (3000K-1800K), offered in multiple beam spread options that can be changed in the field: Spot (20 degree), Narrow Flood (35 degree), Flood (45 degree), and Wide Flood (60 degree) beam angle options. You may feed up to to 9 Radiant medium fixtures with a single 24VDC remote Universal power supply (power supply required and sold separately). Universal power supply dimmable with ELV/TRIAC/0-10V. Note: Required remote power supply sold separately.

Specifications


COLOR N/A
BODY FINISH White
WATTAGE 11W
DIMMER Low Voltage Electronic
DIMENSIONS 1.96"W x 2.83"H
INTEGRATED LED MODULE 1 x LED/11W/24V LED

Technical Information

LAMP LIFE 60000 hours
BEAM ANGLE 20°
COLOR RENDERING 97 CRI
LAMP COLOR 2400K
LUMENS/WATT 76.91
LUMINOUS FLUX 846 lumens



Shown in white

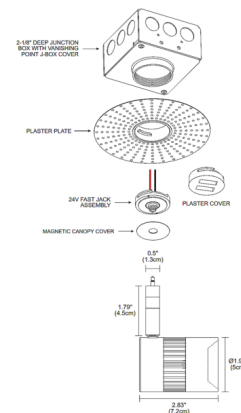

CLICK TO VIEW PRODUCT

Notes: