

Lightology

lightology.com
866-954-4489
02-11-26

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **EDG1117925**
Approved On: _____ Approved By: _____

Vanishing Point Tubo Large for Drywall 24V/Remote Power

By PureEdge Lighting



Description

The Vanishing Point Tubo Large integrates with the Vanishing Point Plaster-In-System for use in drywall applications. Features a .5 inch opening with no visible canopy line -- just the small .5 inch point of connection where the fixture stem disappears into the ceiling. Available in a variety of color temperature options offered in multiple beam spread options that can be changed in the field: 2400K, 2700K, 3000K and 3500K available in Narrow Spot (10 degree), Spot (20 degree), Narrow Flood (35 degree), Flood (45 degree), and Very Wide Flood (75 degree) beam angle options. Note For 7 degree use STB16-BK snoot with NS beam spread. Warm Dim available in Spot (20 degree), Narrow Flood (35 degree), and Flood (45 degree) only. You may feed up to 6 Tubo large fixtures with a single 24VDC remote Universal power supply (power supply required and sold separately). Universal power supply dimmable with ELV/TRIAC/0-10V. Required remote power supply sold separately. Title 24 compliant when used with 2700K color temperature and a Universal power supply. Product is built to order.

Specifications


COLOR N/A
BODY FINISH White
WATTAGE 14W
DIMMER Low Voltage Electronic
DIMENSIONS 2.34"W x 4.92"H
INTEGRATED LED MODULE 1 x LED/14W/24V LED

Technical Information

LAMP LIFE 60000 hours
BEAM ANGLE 10°
COLOR RENDERING 97 CRI
LAMP COLOR 2400K
LUMENS/WATT 73.71
LUMINOUS FLUX 1032 lumens



Shown in white

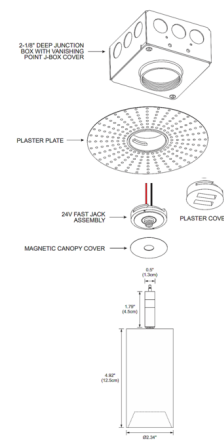

CLICK TO VIEW PRODUCT

Notes: