Lightology

lightology.com
866-954-4489
11-08-26

Project:

Company:

Location: Fixture Type:

SPEC #: **EDG1117925**

Approved On: Approved By:

Vanishing Point Tubo Large for Drywall 24V/Remote Power


By PureEdge Lighting

Description

The Vanishing Point Tubo Large integrates with the Vanishing Point Plaster-In-System for use in drywall applications. Features a .5 inch opening with no visible canopy line -- just the small .5 inch point of connection where the fixture stem disappears into the ceiling. Available in a variety of color temperature options offered in multiple beam spread options that can be changed in the field: 2400K, 2700K, 3000K and 3500K available in Narrow Spot (10 degree), Spot (20 degree), Narrow Flood (35 degree), Flood (45 degree), and Wide Flood (60 degree) beam angle options. Note: For 7 degree use STB16-BK snoot with NS beam spread. Warm Dim available in Spot (20 degree), Narrow Flood (35 degree), and Flood (45 degree) only.You may feed up to to 6 Tubo large fixtures with a single 24VDC remote Universal power supply (power supply required and sold separately). Universal power supply dimmable with ELV/TRIAC/0-10V. Required remote power supply sold separately.Title 24 compliant when used with 2700K color temperature and a Universal power supply.Product is built to order.



Shown in white

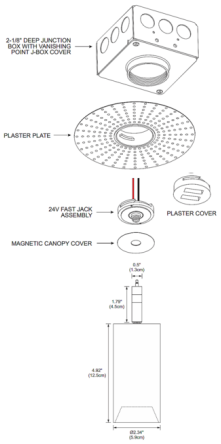

Specifications

COLOR	N/A
BODY FINISH	White
WATTAGE	14W
DIMMER	Low Voltage Electronic
DIMENSIONS	2.34"W x 4.92"H
INTEGRATED LED MODULE	1 x LED/14W/24V LED

Technical Information

LAMP LIFE	60000 hours
BEAM ANGLE	10°
COLOR RENDERING	97 CRI
LAMP COLOR	2400K
LUMENS/WATT	73.71
LUMINOUS FLUX	1032 lumens

CLICK TO VIEW PRODUCT

Notes: