

# Lightology

lightology.com  
866-954-4489  
02-11-26

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **EDG1117971**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Vanishing Point Tubo Small for Drywall 24V/Remote Power

By PureEdge Lighting




### Description

The Vanishing Point Tubo Small integrates with the Vanishing Point Plaster-In-System for use in drywall applications. Features a .5 inch opening with no visible canopy line -- just the small .5 inch point of connection where the fixture stem disappears into the ceiling. Available in a variety of color temperature options, including Warm Dim (3000K-1800K), offered in multiple beam spread options that can be changed in the field: 2400K, 2700K, 3000K, 3500K available in: Narrow Spot (15 degree), Spot (25 degree), Narrow Flood (35 degree), Flood (45 degree), and Very Wide Flood (75 degree) beam angle options. Warm Dim available in: Spot (25 degree), Narrow Flood (35 degree) and Flood (45 degree) only. You may feed up to 15 Tubo small fixtures with a single 24VDC remote Universal power supply (power supply required and sold separately). Universal power supply dimmable with ELV/TRIAC/0-10V. Note: Required remote power supply sold separately.



Shown in white

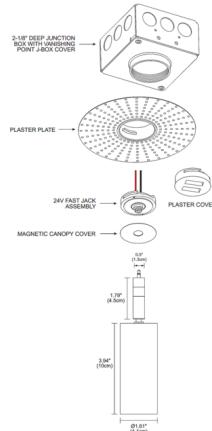

### Specifications

COLOR	N/A
BODY FINISH	White
WATTAGE	8.5W
DIMMER	Low Voltage Electronic
DIMENSIONS	1.61" W x 3.94" H
INTEGRATED LED MODULE	1 x LED/8.5W/24V LED

### Technical Information

LAMP LIFE	60000 hours
BEAM ANGLE	15°
COLOR RENDERING	97 CRI
LAMP COLOR	2400K
LUMENS/WATT	57.06
LUMINOUS FLUX	485 lumens



CLICK TO VIEW PRODUCT

Notes: