

# Lightology

lightology.com  
866-954-4489  
02-12-26

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **EDG1118021**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Vanishing Point Tubo SM Downlight-Millwork 24V/Remote Power

By PureEdge Lighting



### Description

The Vanishing Point Tubo Small Downlight integrates with the Vanishing Point Plaster-In-System for use in millwork applications. Features a .5 inch opening with no visible canopy line -- just the small .5 inch point of connection where the fixture stem disappears into the ceiling. Up to 10 fixtures can be fed using the remote universal power supply. Available in a variety of color temperature options, including Warm Dim 3000K-1800K, offered in multiple beam spread options that can be changed in the field. 2400K, 2700K, 3000K and 3500K available in Spot (25 degree), Flood (35 degree), and Wide Flood (45 degree) beam angle options. Warm Dim available in Flood (35 degree), and Wide Flood (45 degree) only. Note: A 24VDC remote Universal power supply is required and sold separately. Universal power supply dimmable with ELV/TRIAC/0-10V. Note: Title 24 compliant when used with a Universal power supply and 2700K color temperature.

### Specifications


COLOR . . . . . N/A  
BODY FINISH . . . . . White  
WATTAGE . . . . . 8.5W  
DIMMER . . . . . Low Voltage Electronic  
DIMENSIONS . . . . . 1.61"W x 3.94"H  
INTEGRATED LED MODULE . . . . . 1 x LED/8.5W/24V LED

### Technical Information

LAMP LIFE . . . . . 60000 hours  
BEAM ANGLE . . . . . 25°  
COLOR RENDERING . . . . . 97 CRI  
LAMP COLOR . . . . . 2400K  
LUMENS/WATT . . . . . 57.06  
LUMINOUS FLUX . . . . . 485 lumens



Shown in white

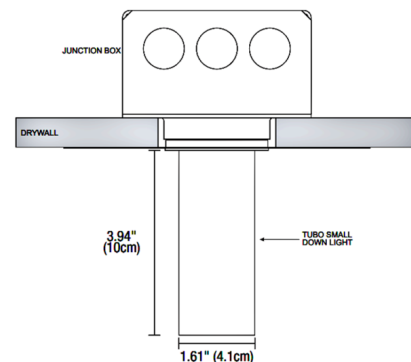

CLICK TO VIEW PRODUCT

Notes: