

# Lightology

lightology.com  
866-954-4489  
08-03-25

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **EDG1118770**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Verge Ceiling Tunable White 2K6K Plaster-In System

By PureEdge Lighting



### Description

Verge Tunable White Ceiling features a slim plaster-in aluminum channel with a 4 inch paintable aluminum backer plate. The channel highlights ceiling perimeters while emitting ambient illumination. Verge houses a single row of commercial grade LEDs available in 2K6K 2000-6500K Tunable White color temperature. Verge is sold in 5 foot increments up to 40 feet (20 feet for 5 watt) and may be field-cut to any length. ETL listed. Product is built to order. Included components: Junction Box, Adjustable Mounting Bars, Verge Wall Channel(s), Backer Plate, Drywall Screws, LED Soft Strip, and Lens(es). A VG-1RE-JBOX rough-in junction box is available to rough-in electrical before drywall installation (included and sold separately). Note: A DMX color changing power supply or 2XK 0-10V 2-Channel power supply is required and sold separately. 0-10V requires two dimmers --one for intensity and one for color temperature. DMX power supply must be used with PureEdge controller (CDMX1-2XK).

### Specifications


COLOR	N/A
BODY FINISH	Aluminum
WATTAGE	25W
DIMMER	N/A
DIMENSIONS	60"L x 0.75"W x 4.13"H
INTEGRATED LED MODULE	5 x LED/5W/24V LED

### Technical Information

LAMP LIFE	50000 hours
COLOR RENDERING	90 CRI
LAMP COLOR	2000K-6000K Tunable White
LUMENS/WATT	744.00
LUMINOUS FLUX	3720 lumens



Shown in aluminum

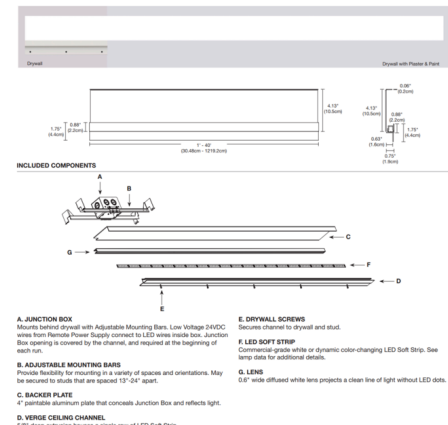

CLICK TO VIEW PRODUCT

Notes: