

# Lightology

lightology.com  
866-954-4489  
08-30-25

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **EDG1142293**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Stomp Strip Tunable White with Pin or Soldered Leads 24V

By PureEdge Lighting



### Description

Stomp Strip 24VDC Tunable White is highly durable and designed to withstand damage from stomping and twisting on a job site. 24V, 120-277V input. Field cuttable. Industrial 3M tape lined strip for self adhesion to most smooth, finished surfaces. Compatible for use with all PureEdge 5/8 inch drywall BIY channels including Truline, Reveal and Verge. Tunable White allows for independent control of color temperatures and dimming. Note: Sold in 1 foot increments up to 40 feet 2W (2.5 watts per foot), up to 20 feet 5W (4.6 watts per foot), up to 12 feet 7W (7.3 watts per foot), or up to 10 feet 10W (9.6 watts per foot) with 27K6 Tunable White (2700K-6500K) or 2K6K Tunable White (2000K-6500K) color temperature. Available in following configurations: PIN Connector (PIN) 6 Foot Soldered Lead/1 End (SE1) 6 Foot Soldered Leads/2 Ends (SE2) Note: A DMX color changing power supply or 2XK 0-10V 2-Channel power supply is required and sold separately. 0-10V requires two dimmers --one for intensity and one for color temperature. DMX power supply must be used with PureEdge controller (CDMX1-2XK).

### Specifications


COLOR . . . . . N/A  
BODY FINISH . . . . . Aluminum  
WATTAGE . . . . . 2W  
DIMMER . . . . . 0-10V  
DIMENSIONS . . . . . 12"L x 0.4"W  
INTEGRATED LED MODULE . . . . . 1 x LED/2W/24V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
COLOR RENDERING . . . . . 92 CRI  
LAMP COLOR . . . . . 2000K-6000K Tunable White  
LUMENS/WATT . . . . . 180.00  
LUMINOUS FLUX . . . . . 360 lumens



Shown in aluminum

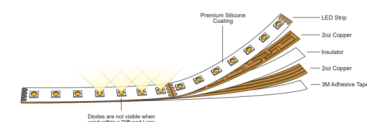

6" Soldered lead, 1 end (SE1)



6" Soldered lead, 2 ends (SE2)



CLICK TO VIEW PRODUCT

Notes: