




BRAND

CSL

DESCRIPTION

The ECO 1 Inch Adjustable New Construction Housing is offered in an IC Airtight rated and Non-IC rated option and fits into drywall or T-bar grid ceiling spaces. Adjustable 0 to 45 degree tilt with 360 degree rotation. Includes tilt angle indicator to provide easy and accurate aiming. Features 120/277V Universal driver offering 1%-100% TRIAC/ELV/0-10V dimming and delivering up to 899 lumens. Available in three color temperature options. ECO 1 includes a 50 degree optic for general task and accent lighting with minimal glare. Insert up to two lenses for additional light control, sold separately. ECO 1 pairs with a variety of trim styles and colors (round and square, standard and flangeless) for a clean ceiling aesthetic. Rated for wet locations when used with a wet location trim. Note: A complete fixture requires a housing, trim (and mud-in plate for flangeless), sold separately.

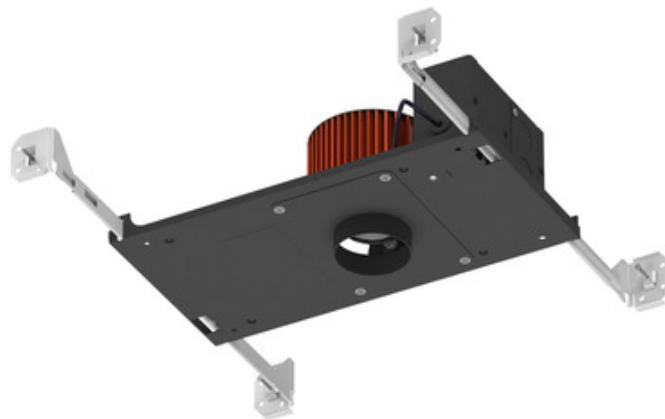


Shown in: Black

TRIM COLOR	N/A
BODY FINISH	Black
WATTAGE	10W
DIMMER	Low Voltage Electronic
DIMENSIONS	11.75"W x 3.31"H x 6.13"D
INTEGRATED LED MODULE	
LAMP	1 x LED/10W/120-277V LED

Technical Information

LUMINOUS FLUX	719 lumens
LUMENS/WATT	71.90
LAMP COLOR	2700K
COLOR RENDERING	90 CRI
BEAM ANGLE	50°
LAMP LIFE	55000 hours
HOUSING TYPE	New Construction NON IC

SPEC # CSL1160413

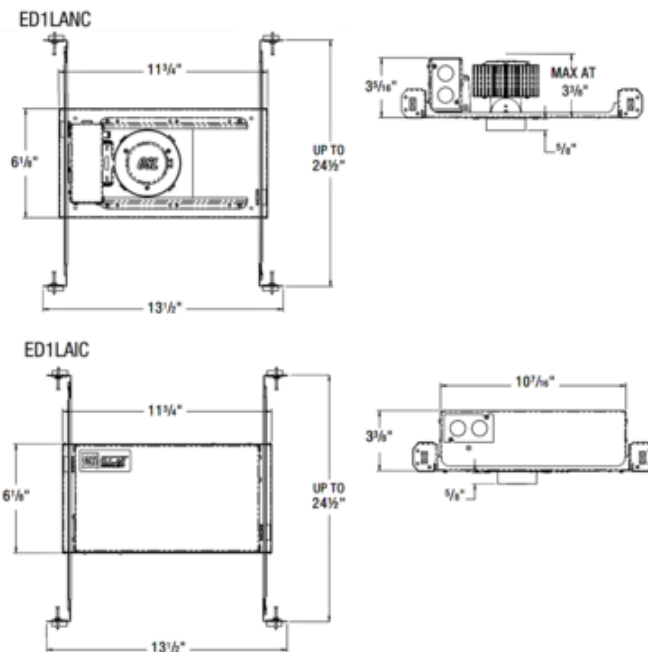

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE