

Lightology

lightology.com
866-954-4489
07-28-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **CSL1160438**
Approved On: _____ Approved By: _____

ECO 3IN Shallow New Construction IC Housing By CSL



Description


The ECO 3 Inch Shallow New Construction Housing is ready to install into 2.5 inch shallow plenums in drywall or T-bar grid ceilings with IC, Airtight and Chicago Plenum certifications. Features a 120/277V Universal driver offering 1%-100% TRIAC/ELV/0-10V dimming and delivering up to 1900 lumens. Available in three color temperature options and Warm Dim (3000K-1800K) which visually warms the space as the lights are dimmed. ECO 3 includes a fixed 50 degree optic for general task and accent lighting with minimal glare. Insert up to two lenses for additional light control, sold separately. ECO 3 pairs with a variety of trim styles and colors (round and square, with flange and flangeless) for a clean ceiling aesthetic. Rated for wet locations when used with a wet location trim. Warm Dim with 10, 30, or 50 degree optic requires an MP (Solite Lens); Warm Dim with 80 degree optic requires an FR (Frosted Lens), sold separately. Note: A complete fixture requires a housing, trim, (and mud-in plate for flangeless), sold separately.

Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Black
WATTAGE	15W
DIMMER	Low Voltage Electronic
DIMENSIONS	9.63"W x 2.38"H x 7.5"D
INTEGRATED LED MODULE	1 x LED/15W/120-277V LED
COUNTRY OF ORIGIN	China

Technical Information

HOUSING HEIGHT	2.5"
HOUSING TYPE	New construction IC Airtight
LAMP LIFE	55000 hours
BEAM ANGLE	50°
COLOR RENDERING	90 CRI
LAMP COLOR	2700K
LUMENS/WATT	77.20
LUMINOUS FLUX	1158 lumens

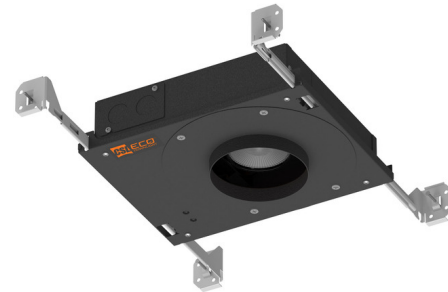

Shown in black

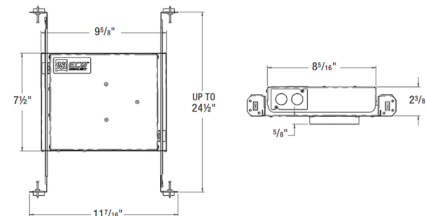

CLICK TO VIEW PRODUCT

Notes: