

Lightology

lightology.com
866-954-4489
11-07-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **CSL1160445**
Approved On: _____ Approved By: _____

ECO 5IN Adjustable New Construction Housing By CSL



Description


The ECO 5 Inch Adjustable New Construction Housing is offered in an IC Airtight rated and Non-IC rated option and fits into drywall or T-bar grid ceiling spaces. Adjustable 0 to 45 degree tilt with 360 degree rotation. Includes tilt angle indicator to provide easy and accurate aiming. Features 120/277V phase control driver offering 1%-100% TRIAC or ELV dimming and delivering up to 1575 lumens. Available in three color temperature options. ECO 5 includes a 50 degree optic for general task and accent lighting with minimal glare. Insert up to two lenses for additional light control, sold separately. ECO 5 pairs with a variety of trim styles and colors (round and square, standard and flangeless) for a clean ceiling aesthetic. Rated for wet locations when used with a wet location trim. Note: A complete fixture requires a housing, trim (and mud-in plate for flangeless), sold separately.

Specifications


REFLECTOR/BAFFLE COLOR N/A
BODY FINISH Black
WATTAGE 16W
DIMMER Low Voltage Electronic
DIMENSIONS 12.94"W x 4.25"H x 8.63"D
INTEGRATED LED MODULE 1 x LED/16W/120-277V LED
COUNTRY OF ORIGIN China

Technical Information

HOUSING HEIGHT 5"
HOUSING TYPE New Construction NON IC
LAMP LIFE 55000 hours
BEAM ANGLE 50°
COLOR RENDERING 90 CRI
LAMP COLOR 2700K
LUMENS/WATT 79.25
LUMINOUS FLUX 1268 lumens

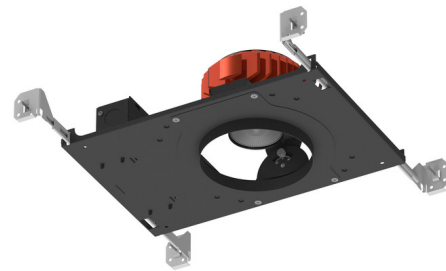

Shown in black

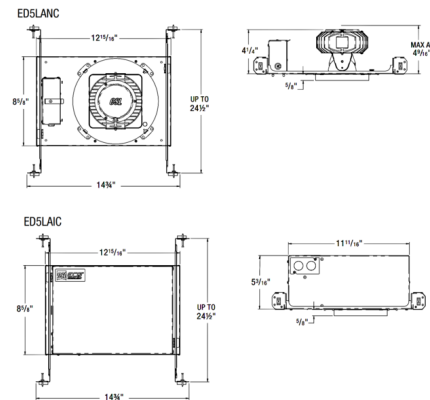

CLICK TO VIEW PRODUCT

Notes: