Lightology

lightology.com
866-954-4489
10-30-26

Project:

Company:

Location: Fixture Type:

SPEC #: **OKT1165642**


Approved On: Approved By:

Color/Wattage-Select Indirect Recessed Troffer


By OKT Lighting


Description

The Color/Wattage-Select Indirect Recessed Troffer delivers precisely controlled indirect ambient lighting, ideal for achieving optimal light distribution in offices, work areas and commercial spaces. The unique LED optics on the center panel are nearly transparent when turned off, disappearing into the ceiling for a clean architectural look. A white powder coat finish ensures longevity and a superior aesthetic. This recessed troffer is compatible with most 15/16 inch and 9/16 inch T-grid ceiling systems. Color temperature (CCT) can be adjusted to 3000K, 3500K, or 4000K. For the 2 x 2 ft light, wattage can be adjusted to 20W, 30W, or 40W. The 2 x 4 ft light can be adjusted to 30W, 40W, or 50W.

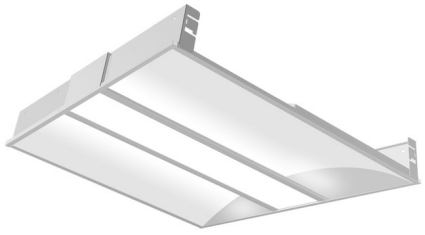

Shown in alpine white



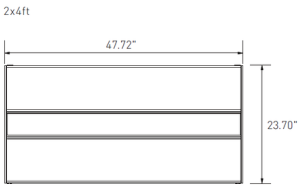

Specifications

COLOR	N/A
BODY FINISH	Alpine White
WATTAGE	40W
DIMMER	0-10V
DIMENSIONS	23.7"L x 23.7"W x 3.54"H
INTEGRATED LED MODULE	1 x LED/40W/120-277V LED

Technical Information

LAMP LIFE	50000 hours
COLOR RENDERING	80 CRI
LAMP COLOR	CCT Select
LUMENS/WATT	110.00
LUMINOUS FLUX	4400 lumens

CLICK TO VIEW PRODUCT

Notes: