

Lightology

lightology.com
866-954-4489
07-06-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **ELE1188647**
Approved On: _____ Approved By: _____

Entra CL 2IN Round Flanged New Construction Housing

By Visual Comfort Architectural



Description

This Entra CL 2 Inch IC Airtight or Chicago Plenum new construction housing is designed for use with Entra CL 2 inch round adjustable, fixed downlight, or wall wash flanged trims. The housing includes a Universal 120-277V LED driver, dimmable by standard reverse-phase, forward-phase, TRIAC, or 0-10V dimming (down to 5%). 277V is only compatible with 0-10V dimming. Damp-rated when used with an adjustable trim, wet-rated when used with a fixed downlight or wall wash trim. Note: A complete fixture requires this housing and a trim, sold separately. The light module is included with the trim.

Specifications


REFLECTOR/BAFFLE COLOR N/A
BODY FINISH Galvanized Steel
WATTAGE 12W
DIMMER Low Voltage Electronic
DIMENSIONS 12.1"W x 3.5"H x 8.8"D
BULB NOT INCLUDED 1 x LED/12W/120-277V LED

Technical Information

APERTURE SHAPE Round
HOUSING HEIGHT 3.5"
HOUSING TYPE Chicago plenum approved
CEILING TYPE Drywall with Trim
LUMENS/WATT 91.67
LUMINOUS FLUX 1100 lumens



Shown in galvanized steel

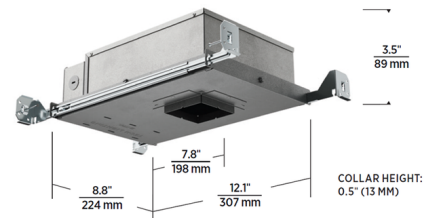

CLICK TO VIEW PRODUCT

Notes: