Lightology

lightology.com
866-954-4489
11-08-26

Project:

Company:

Location: Fixture Type:

SPEC #: **ELE1188648**


Approved On: Approved By:

Entra CL 2IN Round Flanged New Construction Housing


By Visual Comfort Architectural

Description

This Entra CL 2 Inch IC Airtight or Chicago Plenum new construction housing is designed for use with Entra CL 2 inch round adjustable, fixed downlight, or wall wash flanged trims.The housing includes a Universal 120-277V LED driver, dimmable by standard reverse-phase, forward-phase, TRIAC, or 0-10V dimming (down to 5%). 277V is only compatible with 0-10V dimming. Damp-rated when used with an adjustable trim, wet-rated when used with a fixed downlight or wall wash trim. Note: A complete fixture requires this housing and a trim, sold separately. The light module is included with the trim.

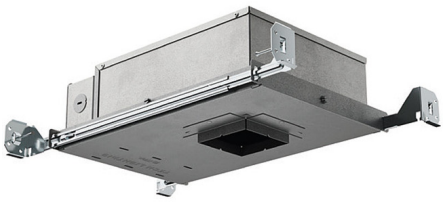

Shown in galvanized steel

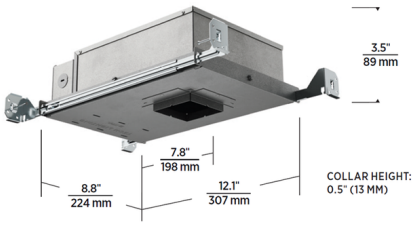

Specifications

REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	8W
DIMMER	Low Voltage Electronic
DIMENSIONS	12.1"W x 3.5"H x 8.8"D
BULB NOT INCLUDED	1 x LED/8W/120-277V LED

Technical Information

APERTURE SHAPE	Round
HOUSING HEIGHT	3.5"
HOUSING TYPE	New construction IC Airtight
CEILING TYPE	Drywall with Trim
LUMENS/WATT	87.50
LUMINOUS FLUX	700 lumens

CLICK TO VIEW PRODUCT

Notes: