

Lightology

lightology.com
866-954-4489
12-07-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **ELE1188758**
Approved On: _____ Approved By: _____

Verse 3IN New Construction IC Airtight Housing

By Visual Comfort Architectural



air
TIGHT



Description

The Verse 3 Inch New Construction IC Airtight Housing offers a recessed lighting solution for residential, multi-family and hospitality applications that is cost-effective yet high-quality and aesthetically pleasing. An LED light module and driver are integrated as part of the housing, and the color temperature options are 2700K and 3000K. Dimmable with reverse phase, forward phase, and TRIAC dimming down to 2% to 4%. The housing profile is minimal at 4.2 inches, ideal for shallow plenums. If the LED module is removed, the housing can be used as a standard junction box for pendants or other light fixtures. Note: A complete fixture requires this housing and a trim, sold separately.

Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	9W
DIMMER	Low Voltage Electronic
DIMENSIONS	3.8"W x 4.2"H
INTEGRATED LED MODULE	1 x LED/9W/120V LED

Technical Information

HOUSING HEIGHT	5"
HOUSING TYPE	New construction IC Airtight
CEILING TYPE	Drywall with Trim
LAMP LIFE	50000 hours
COLOR RENDERING	90 CRI
LAMP COLOR	2700K
LUMENS/WATT	100.33
LUMINOUS FLUX	903 lumens



Shown in galvanized steel

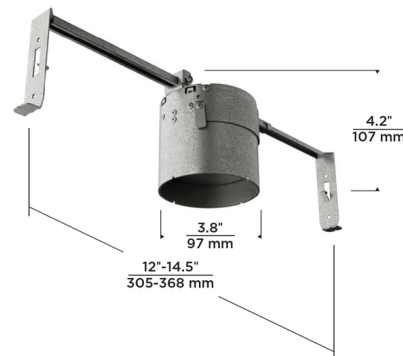

CLICK TO VIEW PRODUCT

Notes: