

Lightology

lightology.com
866-954-4489
07-11-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **EDG1201031**
 Approved On: _____ Approved By: _____

TruLine 1.6A 24VDC Tunable White Drywall Plaster-In System By PureEdge Lighting



Description

The TruLine 1.6A, a versatile 24VDC linear plaster-in LED system, creates glare-free indoor architectural lighting. The 24VDC Plaster-In LED System recesses into 5/8 inch drywall without any joist modification. The slim extrusions, LED strips, and lenses are field-cutable. Includes 5 watts (2x2.5W), 10 watts (2x5W), or 14 watts (2x7W) LED per foot with Tunable White 2K6K (2000K-6500K) LED soft strip. Can be run in vertical, horizontal and diagonal directions. Included components: TruLine 1.6A channel(s), LED Tunable White Soft Strip, TL1.6A Junction Box, Take-Up Box, Adjustable Mounting Bars, Mounting Strap, Power End Cap, Drywall Screw, and Lenses. A DMX color changing power supply or 2XK 0-10 power supply is required and sold separately. 0-10 power supply requires two dimmers --one for intensity and one for color temperature. DMX power supply must be used with PureEdge controller (CDMX1-2XK). Note: Required power supply, dimmer/controller, and optional accessories sold separately. Product is built to order. NOTE: 5 Watt (2x2.5 watts) available up to 40 feet 10 Watt (2x5 watts) available up to 20 feet 14 Watt (2x7 watts) available up to 12 feet

Specifications



COLOR	N/A
BODY FINISH	White
WATTAGE	20W
DIMMER	N/A
DIMENSIONS	48"L x 3.73"W x 1.6"H
INTEGRATED LED MODULE	4 x LED/5W/24V LED

Technical Information

LAMP LIFE	50000 hours
COLOR RENDERING	95 CRI
LAMP COLOR	2000K-6000K Tunable White
LUMENS/WATT	199.20
LUMINOUS FLUX	996 lumens



Shown in white

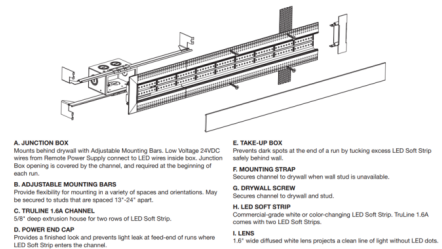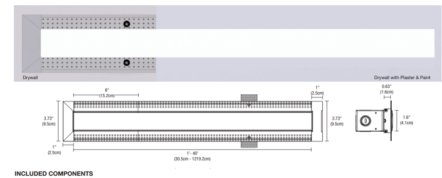

CLICK TO VIEW PRODUCT

Notes: