Lightology

lightology.com
866-954-4489
10-30-26

Project:

Company:

Location: Fixture Type:

SPEC #: **LCF1204179**

Approved On: Approved By:

Atomos 2 Slim Round Downlight Trim / IC Airtight Housing


By Lucifer Lighting

Description

The Atomos 2 Slim Round Downlight Trim with New Construction IC Airtight Housing features a low profile trim and slim housing that is perfect for residential, retail or commercial spaces. The trim and powdercoated aluminum baffle are available in a variety of colors to complement any interior. Includes a soft focus lens. Available with 15 or 50 degree beam optic in 2700K, 3000K, or Warm Dim (3000K - 1800K) color temperatures. Integral 120 volt LED driver dimmable with an electronic low voltage (ELV) or Triac dimmer to 1%.



Shown in white / white baffle

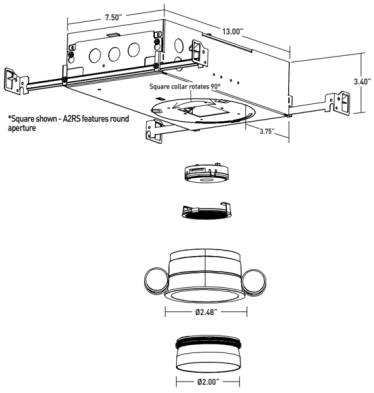

Specifications

REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	White / White Baffle
WATTAGE	15W
DIMMER	Low Voltage Electronic
DIMENSIONS	13"L x 7.5"W x 3.4"H
INTEGRATED LED MODULE	1 x LED/15W/120V LED

Technical Information

PRODUCT DIMENSIONS	IP44 Rated for Wet Locations
APERTURE SIZE	2.000"
APERTURE SHAPE	Round
HOUSING HEIGHT	3.5"
HOUSING TYPE	New construction IC Airtight
CEILING TYPE	Drywall with Trim
FUNCTION	Downlight
LAMP LIFE	50000 hours
BEAM ANGLE	15°
COLOR RENDERING	90 CRI
LAMP COLOR	2700K
LUMENS/WATT	66.00
LUMINOUS FLUX	990 lumens

CLICK TO VIEW PRODUCT

Notes: