

Lightology

lightology.com
866-954-4489
04-28-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **LCF1204341**
 Approved On: _____ Approved By: _____

Atomos 1 Slim Square Pinhole Trim / IC Airtight Housing By Lucifer Lighting



Description

The Atomos 1 Slim Square Pinhole Downlight Trim with New Construction IC Airtight Housing features a low profile trim and slim housing that is perfect for residential, retail or commercial spaces. The zero sightline trim and powdercoated aluminum baffle complement any interior. Includes a soft focus lens. Available with 15 or 50 degree beam optic in 2700K, 3000K, or Warm Dim (3000K - 1800K) color temperatures. Integral 120 volt LED driver dimmable with an electronic low voltage (ELV) or Triac dimmer to 1%.

Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Black / Black Baffle
WATTAGE	15W
DIMMER	Low Voltage Electronic
DIMENSIONS	13"L x 7.5"W x 3.4"H
INTEGRATED LED MODULE	1 x LED/15W/120V LED

Technical Information

APERTURE SIZE	1.000"
APERTURE SHAPE	Pinhole
HOUSING HEIGHT	3.5"
HOUSING TYPE	New construction IC Airtight
CEILING TYPE	Drywall with Trim
FUNCTION	Downlight
LAMP LIFE	50000 hours
BEAM ANGLE	15°
COLOR RENDERING	90 CRI
LAMP COLOR	2700K
LUMENS/WATT	41.13
LUMINOUS FLUX	617 lumens



Shown in black / black baffle

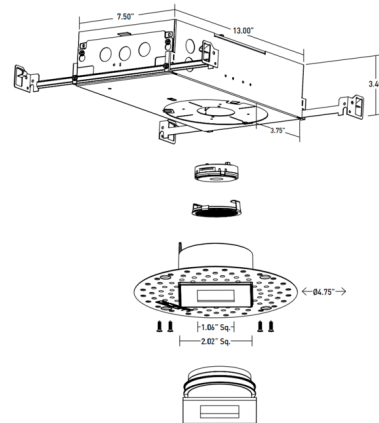

CLICK TO VIEW PRODUCT

Notes: