Lightology

lightology.com
866-954-4489
11-08-26

Project:

Company:

Location: Fixture Type:

SPEC #: **WAC1206053**

Approved On: Approved By:

FQ 2 inch Round Downlight with Trim


By WAC Lighting

Description

The FQ 2 Inch Round With Trim Downlight Trim is designed for use with FQ 2 Inch Series of recessed housings by WAC Lighting. This high performance LED luminaire will provide quality lighting in both commercial and residential settings. Features glare control with 30 degree shielding, 35 degree vertical tilting and 360 degree horizontal rotation. Ceiling cutout: 3.5 inch. Accommodates 0.5 to 1 inch ceiling thickness. TRIAC and ELV dimming at 120V; 0-10V dimming at 277V. Note 1: Field changeable beam angle with reflectors provided (25 degree, 40 degree, 55 degree). Lumens shown are based on 40 degree beam angle.Note 2: A complete fixture requires the trim and a housing, sold separately.



Shown in black

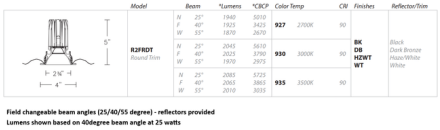

Model	Beam	*Lumens	*CBCP	Color Temp	CRI	Finishes	Reflector/Trim
R2FRDT Round Trim	N 25°	1940	5010	927 2700K	90	BK DB HZWT WT	Black, Dark Bronze, Haze/White, White
	F 40°	1925	3420				
	W 55°	1870	2670				
	N 25°	2045	5610	930 3000K	90		
	F 40°	2025	3790				
	W 55°	1970	2975				
	N 25°	2083	5725	935 3500K	90		
	F 40°	2065	3865				
	W 55°	2010	3035				

Field changeable beam angles (25/40/55 degree) - reflectors provided
Lumens shown based on 40degree beam angle at 25 watts

Specifications

REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Black
WATTAGE	N/A
DIMMER	Low Voltage Electronic
DIMENSIONS	4"W x 5"H
INTEGRATED LED MODULE	1 x LED/120-277V LED

Technical Information

APERTURE SHAPE	Round
CEILING TYPE	Drywall with Trim
FUNCTION	Downlight
LAMP LIFE	50000 hours
BEAM ANGLE	40°
COLOR RENDERING	90 CRI
LAMP COLOR	3500K
LUMINOUS FLUX	2065 lumens

CLICK TO VIEW PRODUCT

Notes: