

Lightology

lightology.com
866-954-4489
12-17-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **EDG122266**
Approved On: _____ Approved By: _____

Light Channel Surface 2.5W 24V Wet - Overstock

By PureEdge Lighting



Description


Surface Mount Wet Location Light Channel features 24 volt Soft Strip inside a slim, paintable aluminum extrusion. LCSMC includes 2.5 watts per foot commercial grade SS2C LED Soft Strip with (VW) 2700K or (WW) 3000K, 95CRI, or (AW) 2400K, (NW) 3500K, (CW) 4000K, or (DW) 5700K color temperature, 85CRI. 43 lumens per watt/126 lumens per foot. 50,000 hour lamp life. The 61 degree white diffuser lens projects a clean line of light and eliminates LED dots, while the clear lens provides maximum light levels. Available in various sizes up to 120 inches. Fixtures include LC-MCL mounting clips every 2 feet and can be linked end-to-end with plug-in or flexible connectors to a maximum of 40 feet away. System is powered by a dimmable electronic low voltage or 0-10V remote power supply. ELV power supplies include a 60, 100, 2X100, 3X100 or 4X100 watt option, dimmable with Legrand Adorne ADTP703TU, Lutron Diva DVELV-300P, Lutron Skylark SELV-300P, Lutron Maestro MAELV-600, or Lutron Radio Ra 2. 0-10V power supplies include a 96, 2X96, 3X96 or 4X96 watt option, dimmable with Philips Sunrise SR1200ZTUNV. ETL listed for wet locations. Major components made and assembled in the USA. 5 year warranty. Required power supply, dimmer control and optional accessories sold separately. NOTE: This is a discontinued model and limited to quantity on hand.

Specifications

COLOR White
BODY FINISH White
WATTAGE 15W
DIMMER Dimmable
DIMENSIONS 72"L x 0.8"W x 0.68"H
INTEGRATED LED MODULE 1 x LED/15W/24V LED

Technical Information

LAMP LIFE 50000 hours
COLOR RENDERING 95 CRI
LAMP COLOR 3000K
LUMENS/WATT 43.00
LUMINOUS FLUX 645 lumens

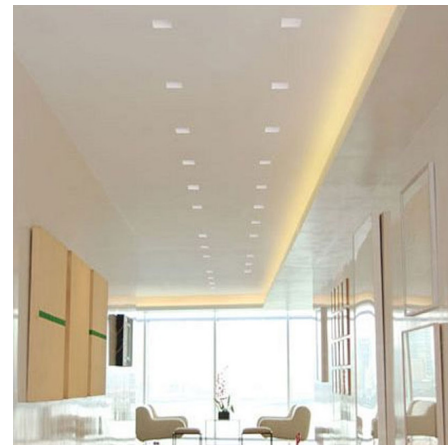

Shown in white / white



CLICK TO VIEW PRODUCT

Notes: