

Lightology

lightology.com
866-954-4489
04-25-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **EDG1265968**
 Approved On: _____ Approved By: _____

Reveal Wall Wash 2 Static White Plaster-In LED System 24V

By PureEdge Lighting



Description

The Reveal Wall Wash 2 is a 24VDC linear LED system that washes the wall from the very top of the ceiling to the floor. Features a shallow, plaster-in aluminum extrusion no thicker than drywall. Position the Reveal 24 inches away from the projected wall, position the LED strip within the channel, connect to a low voltage power supply, then plaster over the edges and paint to match surrounding surface. Finish available in Satin Aluminum or White. Available in 5 or 7 watts per foot in a variety of color temperature options. Sold in 1 foot increments up to 20 feet (5W) or 12 feet (7W) and may be field-cut to any length. System requires a Universal (UNI) power supply, sold separately. Includes a 5 year pro-rated warranty. ETL listed. Suitable for damp locations. Title 24 compliant when used with a Universal (UNI) power supply. Product is built to order. System includes junction box, adjustable mounting bars, Reveal Wall Wash channel(s), power feed end cap, junction box cover, dead end cap, take-up box, drywall screws, LED Soft Strip, and lens(es). Order additional Junction Box (RVWW2-1RE-JBOX) separately to rough-in electrical wiring before drywall installation, sold separately. Required power supply and dimmer control sold separately. Note: 2700 Warm Dim and 3000 Warm Dim are only available in 5W/ft.

Specifications


| | |
|-----------------------|------------------------|
| COLOR | N/A |
| BODY FINISH | Satin Aluminum |
| WATTAGE | 10W |
| DIMMER | Low Voltage Electronic |
| DIMENSIONS | 24"L x 3.75"W x 0.63"H |
| INTEGRATED LED MODULE | 2 x LED/5W/24V LED |

Technical Information


| | |
|-----------------|-------------|
| LAMP LIFE | 50000 hours |
| COLOR RENDERING | 90 CRI |
| LAMP COLOR | 2400K |
| LUMENS/WATT | 101.20 |
| LUMINOUS FLUX | 506 lumens |



Shown in satin aluminum

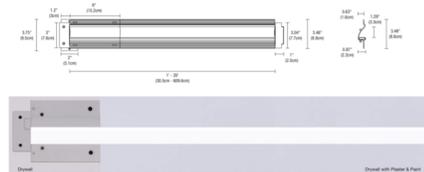

INCLUDED COMPONENTS



- A. JUNCTION BOX**
Includes 100V AC input and 24VDC output. Mounts to wall and provides a secure connection for power feed. Includes 100V AC input and 24VDC output. Mounts to wall and provides a secure connection for power feed.
- B. ADJUSTABLE MOUNTING BARS**
Mounts to wall and provides a secure connection for power feed.
- C. REVEAL WALL WASH CHANNEL**
Mounts to wall and provides a secure connection for power feed.
- D. POWER FEED END CAP**
Mounts to wall and provides a secure connection for power feed.
- E. JUNCTION BOX COVER**
Mounts to wall and provides a secure connection for power feed.
- F. DEAD END CAP PLATE**
Mounts to wall and provides a secure connection for power feed.
- G. TAKE-UP BOX**
Mounts to wall and provides a secure connection for power feed.
- H. LED STRIP**
Mounts to wall and provides a secure connection for power feed.
- I. LENS**
Mounts to wall and provides a secure connection for power feed.



CLICK TO VIEW PRODUCT

Notes: _____