

# Lightology

lightology.com  
866-954-4489  
04-22-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **EDG134743**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Cirrus Ceiling 4S Wall Grazer w/ Remote Power By PureEdge Lighting



### Description

Cirrus Ceiling Channel Wall Grazer with Remote Power and a 4 inch square canopy is a linear LED fixture that brings to life undulating and textured surfaces. May be recessed in ceiling, perimeter or cove. Available in a 5 or 7 watt option in various increments from 12 to 120 inches, features a clear lens with a 10 degree or frosted lens with a 20 degree beam spread, a variety of finish options, and a spectrum of color temperatures. Chrome finish available up to 84 inch length. Ceiling lock clips (CC-MCL-L) are provided for support every 48 inches. Product is built to order. Note: Canopy mounts to a standard junction box either using the PS-60L-ELV-24VDC (60 Watt 24 Volt DC Power Supply) which fits inside junction box, or from a 24VDC remote Universal (UNI) power supply. Universal dimming with UNI power supply (TRIAC/ELV/0-10V). ELV dimming with PS-60L-ELV power supply. Power supply, dimmer control, and optional accessories sold separately.

### Specifications


COLOR . . . . . Frosted  
 BODY FINISH . . . . . Satin Nickel  
 WATTAGE . . . . . 7W  
 DIMMER . . . . . Low Voltage Electronic  
 DIMENSIONS . . . . . 12"L x 0.9"W x 0.9"H  
 INTEGRATED LED MODULE . . . . . 1 x LED/7W/24V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
 COLOR RENDERING . . . . . 95 CRI  
 LAMP COLOR . . . . . 2700K  
 LUMENS/WATT . . . . . 63.14  
 LUMINOUS FLUX . . . . . 442 lumens



Shown in satin nickel / frosted

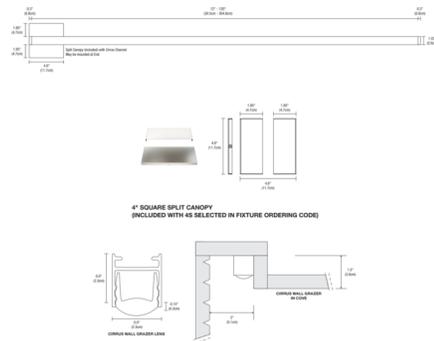

CLICK TO VIEW PRODUCT

Notes: