

# Lightology

lightology.com  
866-954-4489  
02-12-26

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **EDG1355425**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Cirrus Wall Wash Suspension w/ Glare Shield Remote Power

By PureEdge Lighting



### Description

The new generation of the Cirrus Suspension Wall Wash with Glare Shield is precision-engineered to block glare and illuminate vertical surfaces from the top of the ceiling to the floor at a 3.3:1 ratio. The diffused asymmetric wall wash lens creates a smooth and uniform beam spread. Available in 5, 7 or 10 watts per foot, with designer-grade up to 95+ CRI LEDs rendering art and colors in their truest forms. Includes adjustable 12ft coaxial cables (additional aircraft cables included for support when fixture exceeds 96 inches). Powered by Class 2, 24VDC remote power supplies or a 60W ELV power supply that fits within the junction box (ordered separately).

### Specifications


COLOR . . . . . N/A  
BODY FINISH . . . . . Satin Nickel  
WATTAGE . . . . . 20W  
DIMMER . . . . . Low Voltage Electronic  
DIMENSIONS . . . . . 49"L x 0.9"W x 1.25"H  
INTEGRATED LED MODULE . . . . . 4 x LED/5W/24V LED

### Technical Information

PRODUCT DIMENSIONS . . . . . Cord Length: 144"  
LAMP LIFE . . . . . 50000 hours  
COLOR RENDERING . . . . . 95 CRI  
LAMP COLOR . . . . . 2700K  
LUMENS/WATT . . . . . 255.20  
LUMINOUS FLUX . . . . . 1276 lumens



Shown in satin nickel

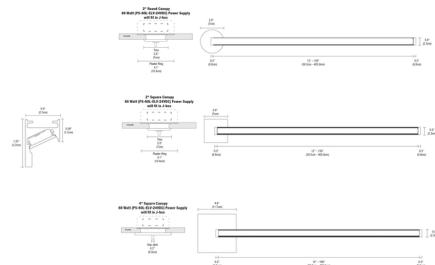

CLICK TO VIEW PRODUCT

Notes: