

# Lightology

lightology.com  
866-954-4489  
08-06-25

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **EDG1357537**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Cirrus Tunable White WallWash Pendant + Shield/Remote Power

By PureEdge Lighting



### Description


The new generation of the Cirrus Tunable White Wall Wash Suspension with Glare Shield is precision-engineered to block glare and illuminate vertical surfaces from the top of the ceiling to the floor at a 3.3:1 ratio. Available in 5, 7 or 10 watts per foot, with designer-grade 95+ CRI LEDs rendering art and colors in their truest forms. Tunable White 2000K-6500K (2K6K) grants independent control and adjustment of color temperature and intensity from 2000K (Sunset) through 6500K (Day Light White). 2K6K is ideal for residential spaces including, dining rooms, bedrooms, living spaces, and bathrooms by allowing the user to achieve a warm glow during the golden hours of the early mornings and evenings. The cooler end of the spectrum promotes focus and alertness which is ideal for offices, healthcare and education. Human-Centric lighting, or tunable white, promotes performance, mood, and overall well-being by fine-tuning the emotional effects that light has on the circadian cycle. Note: Requires remote power supply, sold separately.

### Specifications


COLOR . . . . . N/A  
BODY FINISH . . . . . Satin Nickel  
WATTAGE . . . . . 20W  
DIMMER . . . . . 0-10V  
DIMENSIONS . . . . . 49"L x 0.9"W x 1.25"H  
INTEGRATED LED MODULE . . . . . 4 x LED/5W/24V LED

### Technical Information

PRODUCT DIMENSIONS . . . . . Cord Length: 144"  
LAMP LIFE . . . . . 50000 hours  
COLOR RENDERING . . . . . 92 CRI  
LAMP COLOR . . . . . 2000K-6000K Tunable White  
LUMENS/WATT . . . . . 260.00  
LUMINOUS FLUX . . . . . 1300 lumens

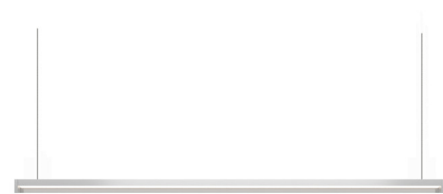

Shown in satin nickel

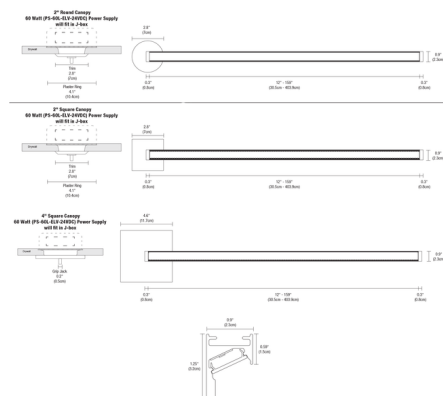

CLICK TO VIEW PRODUCT

Notes: