Lightology

lightology.com
866-954-4489
11-08-26

Project:

Company:

Location: Fixture Type:

SPEC #: **WAC1362213**

Approved On: Approved By:

FQ 4 inch Round Wall Wash with Trim


By WAC Lighting

Description

The FQ 4 Inch Round Wall Wash with Trim is designed for use with FQ 4 Inch Series of recessed housings by WAC Lighting. Features glare control with 30 degree shielding, 45 degree vertical tilt and 360 degree horizontal rotation, and uniform floor-to-ceiling wall washing. Ceiling cutout: 4 3/4 inch. Accommodates 0.5 to 1 inch ceiling thickness. TRIAC and ELV dimming at 120V; 0-10V dimming at 277V. NOTE: A complete fixture requires a trim and a housing, sold separately. Compatible with 13, 19, 25 and 28 watt housings (lumens shown based 3000K with 28 watt housing)



Shown in white

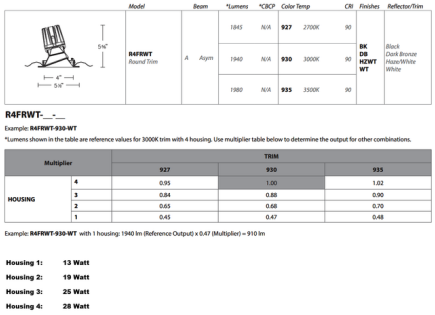

Model	Beam	*Lumens	*CBCP	Color Temp	CRI	Finishes	Reflector/Trim
R4FRWT Round Trim	A Asym	1045	N/A	927 2700K	90	BK DB HZWT WT	Black Dark Bronze Haze/White White
		1940	N/A	930 3000K	90		
		1980	N/A	935 3500K	90		

R4FRWT-__-__

Example: R4FRWT-930-WT

*Lumens shown in the table are reference values for 3000K trim with 4 housing. Use multiplier table below to determine the output for other combinations.

Multiplier		TRIM 927	930	935
HOUSING	4	0.95	1.00	1.02
	3	0.84	0.88	0.90
	2	0.65	0.68	0.70
	1	0.45	0.47	0.48

Example: R4FRWT-930-WT with 1 housing: 1940 lm (Reference Output) x 0.47 (Multiplier) = 910 lm

Housing 1: 13 Watt
Housing 2: 19 Watt
Housing 3: 25 Watt
Housing 4: 28 Watt

Specifications

COLOR . . . . . N/A
BODY FINISH . . . . . White
WATTAGE . . . . . N/A
DIMMER . . . . . Low Voltage Electronic
DIMENSIONS . . . . . 5.5"W x 5.63"H
INTEGRATED LED MODULE . . . . . LED/120-277V LED

Technical Information

APERTURE SIZE . . . . . 4.000"
APERTURE SHAPE . . . . . Round
CEILING TYPE . . . . . Drywall with Trim
FUNCTION . . . . . Wall Washer
LAMP LIFE . . . . . 50000 hours
COLOR RENDERING . . . . . 90 CRI
LAMP COLOR 2700K
LUMINOUS FLUX . . . . . 1940 lumens

CLICK TO VIEW PRODUCT

Notes: