Lightology

lightology.com
866-954-4489
11-08-26

Project:

Company:

Location: Fixture Type:

SPEC #: **WAC1362281**

Approved On: Approved By:

FQ 4 inch Square Warm Dim Wall Wash with Trim


By WAC Lighting

Description

The FQ 4 Inch Square Warm Dim Wall Wash with Trim is designed for use with FQ 4 Inch Series of recessed housings by WAC Lighting. Features glare control with 30 degree shielding, 45 degree vertical tilt and 360 degree horizontal rotation, and uniform floor-to-ceiling wall washing. Warm Dim (3000K-1800K) color temperature.Ceiling cutout: 4 3/4 inch. Accommodates 0.5 to 1 inch ceiling thickness. TRIAC and ELV dimming at 120V; 0-10V dimming at 277V. NOTE: A complete fixture requires a trim and a housing, sold separately. Compatible with 13 and 19 watt housings (lumens shown based on 19 watt housing)



Shown in dark bronze

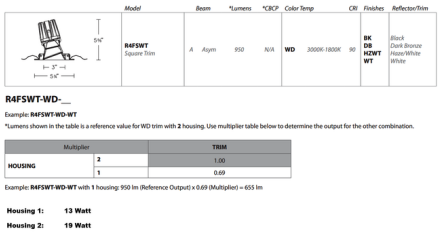

Model	Beam	*Lumens	*CBCP	Color Temp	CRI	Finishes	Reflector/Trim
R4FSWT Square Trim	A Asym	950	N/A	WD 3000K-1800K	90	BK DB HZWT WT	Black Dark Bronze Haze/White White

R4FSWT-WD-__

Example: **R4FSWT-WD-WT**

*Lumens shown in the table is a reference value for WD trim with **2** housing. Use multiplier table below to determine the output for the other combination.

Multiplier		TRIM
HOUSING	2	1.00
	1	0.69

Example: **R4FSWT-WD-WT** with **1** housing: 950 lm (Reference Output) x 0.69 (Multiplier) = 655 lm

Housing 1: **13 Watt**
Housing 2: **19 Watt**

Specifications

COLOR . . . . . N/A
BODY FINISH . . . . . Dark Bronze
WATTAGE . . . . . N/A
DIMMER . . . . . Low Voltage Electronic
DIMENSIONS . . . . . 5.25"W x 5.63"H x 5.25"D
INTEGRATED LED MODULE . . . . . LED/120-277V LED

Technical Information

APERTURE SIZE . . . . . 3.000"
APERTURE SHAPE . . . . . Square
CEILING TYPE . . . . . Drywall with Trim
FUNCTION . . . . . Wall Washer
LAMP LIFE . . . . . 50000 hours
COLOR RENDERING . . . . . 90 CRI
LAMP COLOR . . . . . 3000K Warm Dim
LUMINOUS FLUX . . . . . 950 lumens

CLICK TO VIEW PRODUCT

Notes: