Lightology

lightology.com
866-954-4489
11-07-26

Project:

Company:

Location: Fixture Type:

SPEC #: **WAC1362403**

Approved On: Approved By:

FQ 2 inch 15W With Trim New Construction IC Housing


By WAC Lighting

Description

The FQ 2 Inch 15 Watt IC Rated Airtight New Construction Housing is designed for with trim round or square trims. New construction housings included with universal mounting brackets and hanger bars. Ceiling cutout (Round and Square): 3 1/2 inch. Ceiling thickness: 1/2 - 1 inch.Universal 120/277 with Electronic Low Voltage (ELV): 100%-1%, TRIAC: 100%-1% at 120V, or 0-10V: 100-1% at 277V. Emergency (EM) fixtures provided with integral emergency battery back up with 24 inch lead wire remote test switch. Provides at least 90 minutes of 6W illumination during emergency operation.NOTE: A complete fixture requires a housing and trim (round or square), sold separately.



Shown in galvanized steel

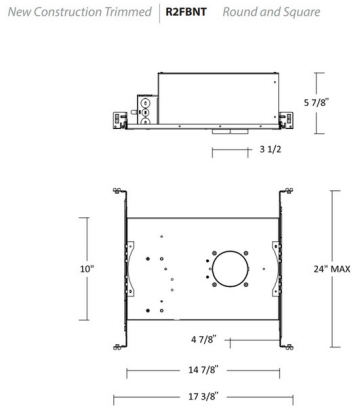

Specifications

COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	15W
DIMMER	Low Voltage Electronic
DIMENSIONS	17.37"W x 5.87"H x 10"D
INTEGRATED LED MODULE	LED/15W/120-277V LED

Technical Information

HOUSING HEIGHT	6"
HOUSING TYPE	New construction IC Airtight
CEILING TYPE	Drywall with Trim

CLICK TO VIEW PRODUCT

Notes: