

Lightology

lightology.com
866-954-4489
05-21-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **EDG1389376**
 Approved On: _____ Approved By: _____

Lazer Line Static White Up or Down Suspended System 24VDC

By PureEdge Lighting



Description

Lazer Line is a 24VDC direct or indirect (uplight or downlight) LED lighting system providing general illumination for architectural applications. The field-cuttable single channel in 3 and 5 watts per foot is sold in 1 inch increments and allows a maximum length of 30 feet (3 watt) or 20 feet (5 watt) with power feed at one end and one non-power turnbuckle, or a maximum length of 60 feet (3 watt) or 40 feet (5 watt) with power feed turnbuckles at both ends. The 4 inch round turnbuckles allow Lazer Line to be positioned 0-90 degrees relative to the mounting surface, creating a 3-dimensional appearance. Mounts to standard 4 inch square junction box with round plaster ring. Paint canopy to blend into wall for a seamless look. Note: System includes Lazer Line channel and mounting hardware. System requires a Universal remote power supply (dimmi-ble TRIAC/ELV/0-10V), sold separately. Product is built to order.

Specifications


COLOR	White
BODY FINISH	Pure White
WATTAGE	15W
DIMMER	Low Voltage Electronic
DIMENSIONS	60"L x 0.44"W
INTEGRATED LED MODULE	5 x LED/3W/24V LED

Technical Information

LAMP LIFE	50000 hours
BEAM ANGLE	120°
COLOR RENDERING	91 CRI
LAMP COLOR	2400K
LUMENS/WATT	421.67
LUMINOUS FLUX	1265 lumens



Shown in pure white / white

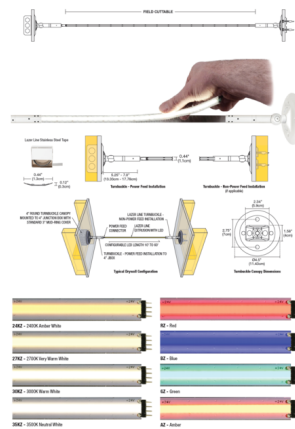

CLICK TO VIEW PRODUCT

Notes: